


2026 C🍁NADA AUTOMOTIVE CATALOG



 **MAXXIS**



MAXXIS CANADA - ONTARIO

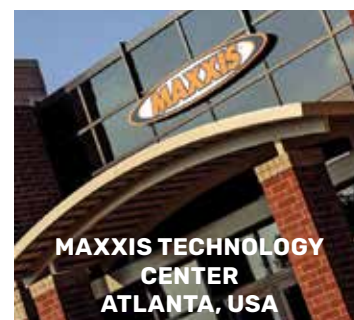

**MAXXIS TECHNOLOGY
CENTER
ATLANTA, USA**



R&D CENTER - YUANLIN, TAIWAN

Maxxis is truly a global company, with operations in Taiwan, China, Thailand, Vietnam, the United States, Canada, Great Britain, Germany, Holland, Japan and Dubai. One of the world's most trusted tire brands, Maxxis delivers high-quality tire products to customers in 180 countries and employs more than 30,000 people.

Of course, we didn't become one of the world's top tire companies overnight. Through the years since its founding in 1967, Maxxis has become known for its commitment to excellent products and customer service.

That commitment to offer the best has led us to create new technologies to develop our tires. Maxxis products are then tested both at our own facilities and at the world's leading tire test centers. Input from our championship-winning drivers and riders also ensures that our products measure up to the toughest real-world standards. Every Maxxis tire is manufactured using the most advanced equipment, by personnel who display a dedication to quality at every level, from management to the factory floor.


But no matter how large we become, the people at Maxxis will always remember that creating and retaining lifelong customers is our primary purpose.



R&D CENTER - YUANLIN, TAIWAN



R&D CENTER - SHANGHAI, CHINA

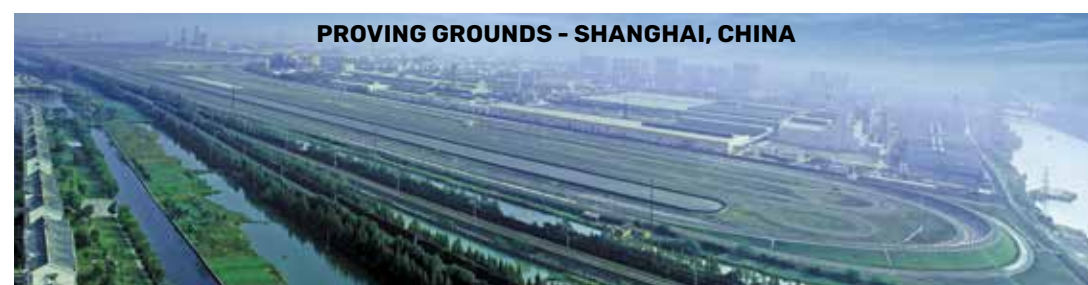

PROVING GROUNDS - SHANGHAI, CHINA

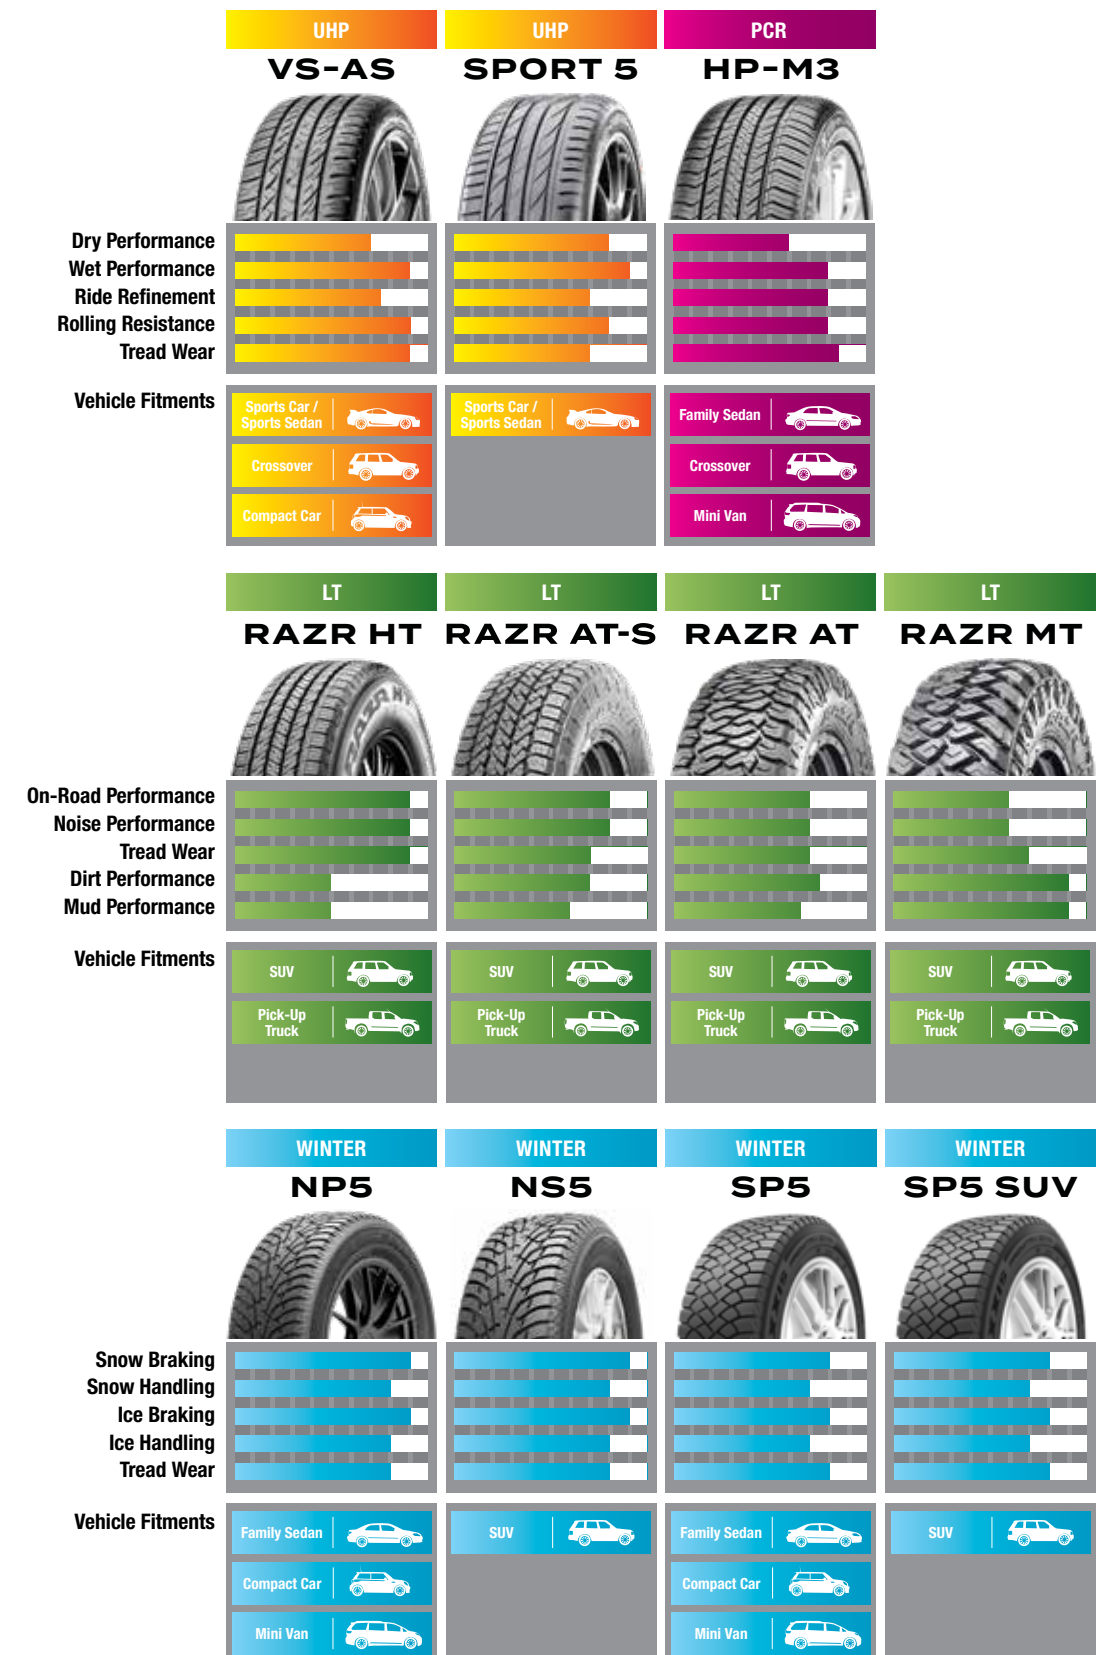


TABLE OF CONTENTS

PRODUCT RANKINGS	4
ULTRA HIGH PERFORMANCE	5-6
VICTRA SPORT AS	7-8
VICTRA SPORT 5	9
PASSENGER CAR RADIAL	11
BRAVO HP-M3	12
LIGHT TRUCK	13-14
RAZR HT	16
RAZR AT-S	17-18
RAZR AT	19-20
RAZR MT	22
WINTER	23-24
PREMITRA NORD NP5	25
PREMITRA NORD NS5	26
PREMITRA ICE SP5	28
TIRE SPECIFICATIONS	29-42
SAFETY INFORMATION	43-46



PRODUCT RANKINGS



Disclaimer: Product ranking scores are applicable only to similar category products.

ULTRA **HIGH** PERFORMANCE



VICTRA SPORT AS



Designed for drivers who want a premium driving experience, the new Victra Sport AS (All-Season) proves that sophistication doesn't have to be boring. The engineers started with a high-strength double-cord casing design which gives you a surefooted driving feel and responsive handling. The asymmetric pattern design has a computer-optimized tread pattern for sporty driving as well as a suite of technologies to minimize pattern noise. The new nano-silica compound coupled with our advanced sipe designs improves traction under wet and light snow conditions.

- UTQG 500 AA A
- New serrated circumferential groove design works like an anechoic chamber which reduces noise resonance for a relaxing premium driving experience
- Multangular sipe arrangement adds biting edges in multiple directions, improving traction in inclement weather and mild snow
- Offset lateral groove design disperses and traps pattern noise for a more serene cabin
- Maxxis Optim-Tech utilizes our latest computer software to optimize tread block arrangement for reduced pattern noise
- Maxxis double-cord casing design elevates casing rigidity for responsive handling
- Full nano silica compound enhances traction under wet conditions

205/55R16	225/45R17	245/45R17	235/45R18	245/40R19
205/50R17	225/50R17	225/40R18	235/50R18	245/45R19
215/45R17	235/45R17	225/45R18	245/40R18	255/40R19
215/50R17	235/50R17	225/50R18	245/45R18	245/40R20
215/55R17	235/55R17	235/40R18	235/40R19	245/45R20

For complete specifications see page 31.

TECHNOLOGY

Serrated Circumferential Grooves

Minimizes pipe resonance for a relaxing and premium driving experience.



3D Sipe Design

Three-dimensional sipe design reduces tread squirm compared to traditional sipes for improved steering feel and driving confidence and reduced irregular wear.



Multangular Sipe Arrangement

Innovative sipe arrangement adds biting edges in all directions, improving traction in inclement weather and mild snow.

Off-Set Lateral Groove Design

New lateral groove design with off-set positioning disperses and traps pattern noise for a more serene cabin.

VICTRA SPORT 5



The Victra Sport 5 was designed for drivers who demand the ultimate street performance tire. Our flagship UHP summer tire features a hybrid nylon/aramid cap-ply and innovative sidewall for maximized high speed handling and crisp cornering. Its next-generation nano-silica compound improves overall dry/wet performance while the 3D tread block design dramatically reduces braking distance. The Victra Sport 5 is worthy of the world's most coveted performance vehicles.

- UTQG 320 AA A
- Hybrid nylon/aramid cap-ply helps to maintain a stable footprint at higher speeds for maximized handling
- 3D tread block design reduces block deflection to improve grip during dry & wet braking
- Next-generation nano-silica tread compound
- Improves overall dry & wet performance without compromising mileage.
- Innovative sidewall construction provides better handling without sacrificing ride comfort
- Advanced tread design with 3+1 groove pattern increases water dispersion for enhanced wet performance

215/65R17	235/55ZR19	255/50ZR20	305/35ZR24	235/45ZR18	225/45ZR19	265/35ZR19
235/65ZR17	255/45ZR19	255/55ZR20	225/45ZR17	245/35ZR18	235/35ZR19	275/35ZR19
235/50ZR18	255/50ZR19	265/45ZR20	235/45ZR17	245/40ZR18	235/40ZR19	275/40ZR19
235/55ZR18	255/55ZR19	275/40ZR20	245/40ZR17	245/45ZR18	245/35ZR19	245/35ZR20
235/60R18	265/50ZR19	275/45ZR20	245/45ZR17	255/35ZR18	245/40ZR19	245/40ZR20
235/60ZR18	275/45ZR19	295/40ZR20	215/40ZR18	255/40ZR18	245/45ZR19	255/40ZR20
235/65ZR18	275/55ZR19	315/35ZR20	225/40ZR18	265/35ZR18	245/55R19	275/30ZR20
255/55ZR18	235/55ZR20	265/40ZR21	225/45ZR18	275/35ZR18	255/35ZR19	275/35ZR20
235/45ZR19	245/45ZR20	275/45ZR21	225/50ZR18	225/35ZR19	255/40ZR19	
235/50ZR19	255/45ZR20	295/35ZR21	235/40ZR18	225/40ZR19	255/45ZR19	

For complete specifications see page 31-32.



PASSENGER CAR RADIAL



BRAVO HP-M3



An all-season standard touring tire with passenger car, crossover and SUV fitments, the Bravo HP-M3 was designed as an all-around performer in dry and wet conditions as well as light snow. The HP-M3 features cross-hatch sipes across the tread for added traction on slippery surfaces, while the four circumferential grooves improve hydroplaning resistance.

- UTQG 700 A A
- H-rated sizes, 70,000-mile limited treadwear warranty*
- V-rated sizes, 60,000-mile limited treadwear warranty*
- W-rated sizes, 50,000-mile limited treadwear warranty*
- 5-rib pattern design engineered to improve tire wear, pattern noise and high-speed stability
- 4 main circumferential grooves expel water quickly for improved hydroplaning resistance
- Streamlined lateral groove design improves overall wet performance
- M+S All-season rated
- Available in passenger, crossover and SUV sizes
- Rim Diameter: 16-20 inch

*visit maxxis.com for complete warranty details
(see dealer for specific UTQG information)

For specifications see pages 33-34.

LIGHT TRUCK





RAZR HT



Developed using Maxxis' latest R&D, the RAZR HT is our new flagship highway terrain tire. Off-set horizontal grooves, triple-layered bridges and semi-closed shoulder pattern result in longer wear and a quiet ride. An optimized pitch tread block arrangement and pattern deliver maximal grip. Four circumferential grooves excel in wet conditions. An updated pattern design and sidewall provide a modern, appealing look.

- UTQG 700 A A - 700 A B (Non LT Sizes ONLY)
- 70,000-mile limited treadwear warranty for non-LT sizes*
- 50,000-mile limited treadwear warranty for LT sizes*
- Off-set horizontal grooves and triple-layered bridges in pattern deliver longer wear and a quiet ride
- Closed shoulder design with closed-end sipes limits pattern noise resonance, further reducing cabin noise
- Four circumferential grooves increase water dispersion, improving hydroplaning resistance and delivering superb wet weather performance
- Optimized pattern and construction design plus a new, improved HT compound provide excellent grip and wear
- M+S All-Season rated

*visit maxxis.com for complete warranty details
(see dealer for specific UTQG information)

235/75R15	265/70R16	245/70R17	245/60R18	255/55R20*	LT235/85R16
215/70R16	265/75R16	255/65R17*	255/65R18	265/50R20	LT245/75R16
225/70R16	275/70R16	255/70R17	265/60R18	275/55R20	LT235/80R17
235/70R16	225/65R17	265/65R17	265/65R18	275/60R20	LT245/75R17*
235/75R16*	235/60R17*	265/70R17	275/65R18	285/50R20	LT265/70R17
245/70R16	235/65R17	225/60R18	285/60R18	275/50R22*	LT275/65R18*
245/75R16	235/75R17	235/60R18*	245/55R19	285/45R22*	LT275/70R18*
255/70R16	245/65R17	235/65R18	255/50R20*	LT225/75R16	LT275/65R20*

*sizes under development

For complete specifications see pages 36.

RAZR AT-S



Whether conditions are snowy, wet or dry, on or off-road, the RAZR AT-S (AT Sport) delivers what outdoor enthusiasts want most: all-weather traction, rugged wear and a peaceful ride. Designed for light-duty vehicles, the AT-S features our latest tread optimization and compound technology. These innovative features deliver a high level of on and off-road performance plus the rugged design that outdoor enthusiasts expect from Maxxis.

- UTQG 660 A A - 660 A B (Non-LT Sizes ONLY)
- 60,000-mile limited treadwear warranty for P-metric sizes*
- 50,000-mile limited treadwear warranty for LT sizes*
- Next-generation all-terrain compound featuring Polymer Optimization Technology enhances tread wear and cut/chip resistance for improved mileage
- S-shaped center blocks enhance pattern stability to improve traction on any terrain
- Optimized tread pitch-arrangement reduces pattern noise for a quieter on-road ride
- Robust RAZR sidewall design offers rugged looks and protection for challenging off-road and on-road conditions
- Mountain Snowflake (3PMSF) certified for severe winter traction ❄️
- M+S All-Season rated

*visit maxxis.com for complete warranty details (see dealer for specific UTQG information)

235/75R15	225/65R17	265/70R17	265/60R20	LT245/75R16	LT285/70R17
235/70R16	235/65R17	285/70R17	275/55R20	LT265/70R16	LT265/60R18
245/70R16	245/65R17	245/60R18	275/60R20	LT265/75R16	LT275/70R18
255/70R16	255/65R17	265/60R18	285/45R22	LT245/75R17	LT285/65R18
265/70R16	255/70R17	275/65R18	LT235/75R15	LT265/65R17	LT275/65R20
225/60R17	265/65R17	265/50R20	LT225/75R16	LT265/70R17	30X9.50R15LT
					31X10.50R15LT

For complete specifications see page 37.

TECHNOLOGY



Saw-toothed Circumferential Grooves
Improved snow shearing force along four circumferential grooves enhances snow traction and water drainage



Jagged Lateral Grooves
Staggered jagged grooves disperse water, sand, and snow more efficiently, improving handling and braking performance



Semi-continuous Center Rib
S-shaped center blocks enhance pattern stability to improve traction on any terrain



Reinforcement Bridges
High-stiffness bridge design helps to minimize tread block movement, suppressing pattern noise and reducing irregular wear

RAZR AT



Our flagship all-terrain tire builds on the strengths of the Bravo AT-771. Chemical fillers in the RAZR AT's compound maximize tread life and resist tears and chips. Three-D tread blocks and bridge reinforcements minimize noise and irregular wear, and the armor sidewall design optimizes sidewall traction and puncture resistance. An innovative double-cord casing design ensures durability and a comfortable ride.

- UTQG 600 A A - 600 A B (Non-LT Sizes ONLY)
 - 60,000-mile limited treadwear warranty for P-metric sizes*
 - 50,000-mile limited treadwear warranty for LT sizes*
 - Off-road compound with advanced chemical fillers optimizes resistance to tears and delivers excellent tread life
 - Maxxis double-cord technology provides superior durability and casing strength
- Aggressive armor sidewall design maximizes sidewall traction and puncture resistance
 - All-terrain tread design featuring 3D tread blocks and bridge reinforcements minimizes pattern noise and delivers longer wear
 - Mountain Snowflake (3PMSF) certified 
 - M+S All-Season rated
 - Load Range C, D, E, F

*visit [maxxis.com](https://www.maxxis.com) for complete warranty details
(see dealer for specific UTQG information)

245/75R16	265/70R17	LT245/75R16	LT265/60R18	LT275/60R20	LT285/55R22	37X12.50R20LT
255/70R16	P285/70R17	LT265/70R16	LT265/70R18	LT275/65R20	31X10.50R15LT	37X13.50R20LT
265/70R16	255/70R18	LT265/75R16	LT275/65R18	LT285/55R20	35X11.50R17LT	40X13.50R20LT
265/75R16	265/60R18	LT285/75R16	LT275/70R18	LT285/65R20	35X12.50R17LT	35X12.50R22LT
225/60R17	265/65R18	LT245/75R17	LT285/65R18	LT295/55R20	37X12.50R17LT	37X12.50R22LT
225/65R17	275/65R18	LT265/65R17	LT285/75R18	LT295/60R20	33X12.50R18LT	37X13.50R22LT
235/65R17	265/50R20	LT265/70R17	LT295/70R18	LT295/65R20	35X12.50R18LT	
245/65R17	275/55R20	LT285/70R17	LT265/60R20	LT305/55R20	33X12.50R20LT	
265/65R17	275/60R20	LT295/70R17	LT275/55R20	LT285/50R22	35X12.50R20LT	

For complete specifications see pages 37-38.

TECHNOLOGY



- Unique RAZR tread pattern enhances grip and promotes outstanding traction on every type of terrain
- Open groove tread design promotes superior evacuation of water, mud and debris
- Anti-Pack convex shoulder blocks maximize tread cleanout with every revolution
- 3D Sipes strengthen the tread blocks to provide superior handling and performance
- Stepped chamfering design provides superior rigidity that ensures even uniform wear



- Stepped shape with sidewall protection aids in preventing punctures
- Shield shape prevents the shoulder block from tearing
- 3D step design sidewall text "RAZR AT" enhances the visual component of the tires



RAZR MT



Our flagship mud terrain tire, the RAZR MT was created with input from Maxxis' championship-winning sponsored athletes. Chemical fillers in the RAZR MT's off-road compound deliver maximum tear and chip resistance as well as tread life. The innovative armor sidewall design maximizes traction and puncture resistance, while the double-cord casing and 3-body-ply technology enhance toughness and durability.

- 40,000-mile limited treadwear warranty*
- Off-road compound with new chemical fillers delivers superlative tear resistance and tread life
- Maxxis double-cord casing technology dramatically improves casing strength for superior durability and toughness, while 3-body-ply construction in select sizes provides additional puncture resistance and toughness
- Innovative armor sidewall design provides maximal sidewall traction and puncture resistance
- Pattern design featuring deeply sculpted center blocks offers excellent off-road traction with minimized pattern noise
- M+S All-Season rated
- Three-ply construction for additional puncture resistance and durability
- Available in Flotation and LT sizes
- Rim Diameter 16 – 24 inch
- Load Range C, D, E, F

*visit maxxis.com for complete warranty details

LT245/75R16	LT285/70R17	LT285/75R18	32X11.50R15LT	37X12.50R17LT	37X12.50R18LT	37X13.50R20LT
LT265/70R16	LT295/70R17	LT295/65R18	33X10.50R15LT	37X13.50R17LT	33X12.50R20LT	38X13.50R20LT
LT265/75R16	LT305/70R17	LT295/70R18	33X12.50R15LT	40X13.50R17LT	35X12.50R20LT	40X13.50R20LT
LT285/75R16	LT275/65R18	LT275/65R20	35X12.50R15LT	33X12.50R18LT	35X12.50R20LT	35X12.50R22LT
LT315/75R16	LT275/70R18	LT295/55R20	35X12.50R17LT	35X12.50R18LT	37X12.50R20LT	37X12.50R22LT
LT265/70R17	LT285/65R18	LT295/60R20	35X13.50R17LT	35X12.50R18LT	37X13.50R20LT	37X13.50R22LT
		LT295/65R20				

For complete specifications see pages 39.

WINTER



WINTER

PREMITRA ICE NORD NP5



Our flagship studdable ice tire for passenger cars, the Premitra Ice Nord NP5 handles winter weather with ease. The tire features an innovative rubber suction stud design for improved ice traction, while the aggressive saw-tooth tread blocks cut through snow for improved snow traction. An optimized shoulder design minimizes rolling resistance.

- Directional tread design promotes water evacuation and improves self-cleaning performance
- New innovative rubber suction stud design provides extra bite into icy surfaces for improved ice traction
- Saw-tooth block and high-density sipe arrangement for improved grip on snow and ice
- New shoulder design optimized for maximum aerodynamic and fuel efficiency
- Special bead filler compound reduces heat generation and minimizes rolling resistance
- M+S/Mountain Snowflake symbol certification

175/70R13	185/60R15	205/55R16	215/50R17
175/65R14	185/65R15	205/60R16	215/55R17
175/70R14	195/55R15	215/55R16	225/45R17
185/60R14	195/60R15	215/60R16	225/50R17
185/65R14	195/65R15	225/60R16	225/55R17
185/70R14	205/65R15	205/50R17	245/40R18
185/55R15	195/55R16	205/55R17	

For complete specifications see page 40.

PREMITRA ICE NORD NS5



Our flagship studdable ice tire for SUVs, the Premitra Ice Nord NS5 takes winter traction to a different level. The tire features an innovative rubber suction stud design for improved ice traction, while the aggressive saw-tooth tread blocks cut through snow for improved snow traction. An optimized shoulder design minimizes rolling resistance.

- Innovative bead design improves load-carrying performance over market leader by 16%, offering extra peace of mind under demanding load conditions
- Computer-optimized construction design and premium materials improve high-speed endurance over market leader by 50%, offering further peace of mind during prolonged highway travel and in demanding load conditions
- Advanced compound design minimizes oxidation cracking and prolongs tire life significantly over market leader
- New ST-belt technology reduces stress and strain at belt edge for reduced irregular wear

235/75R15	245/70R16	225/65R17	235/55R18
215/65R16	265/70R16	235/65R17	235/60R18
215/70R16	275/70R16	265/65R17	255/55R18
225/70R16	215/60R17	215/55R18	265/55R19
235/70R16	225/60R17	225/60R18	245/45R20

For complete specifications see page 41.



PREMITRA ICE SP5



This tire uses Maxxis’ advanced SiRu silica compound to enhance on-ice performance, with a softer, more flexible formulation that conforms to uneven road surfaces for improved grip. A dense arrangement of tread blocks, grooves, and 3D sipes increases contact and evenly distributes pressure, delivering reliable traction on icy and snowy roads.

- SiRu Silica Compound – Maxxis’ mixing engineers produced an excellent silica compound named “SiRu” with enhanced molecular distribution and dispersity, which significantly improves the on-ice performance
- Improved Compound – The Maxxis SiRu silica is a softer more supple compound which allows the tire to conform to the uneven icy roads
- Tire Grooves – A large number of intricate tire tread blocks and tire grooves will provide reliable grip on snowy roads
- 3D Sipes – A large number of intricate tire tread blocks and composited sipes will provide reliable grip on icy roads
- Grip Pattern – New tread design increases the contact area, which creates evenly distributed pressure improving ice performance

175/65R14	225/45R17	245/40R19	215/65R17	235/55R18	245/55R19	275/55R20
185/60R15	225/50R17	245/45R19	225/60R17	235/60R18	255/50R19	285/50R20
185/65R15	225/55R17	245/50R19	225/65R17	235/65R18	265/55R19	255/45R21
195/65R15	215/50R18	245/40R20	235/65R17	245/60R18	235/50R20	265/45R21
205/55R16	225/50R18	SUV	245/70R17	265/60R18	235/55R20	275/45R21
205/60R16	235/45R18	215/65R16	265/65R17	285/60R18	255/40R20	265/40R22
205/55R17	245/45R18	245/70R16	215/55R18	225/55R19	255/55R20	
215/50R17	225/45R19	265/70R16	225/55R18	235/50R19	265/50R20	
215/55R17	235/40R19	215/60R17	225/60R18	235/55R19	275/50R20	

For complete specifications see page 41-42.

SPECIFICATIONS



SPECIFICATIONS

SPECIFICATIONS

VICTRA SPORT AS

PART #	SIZE	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	APPROVED Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	UTQG
TP00429800	205/55R16	91W	BSW	24.7	8.5	5.5-(6.5)-7.5	10/32	1356	500 AA A
TP00428700	205/50R17	93W XL	BSW	25.0	8.4	5.5-(6.5)-7.5	10/32	1433	500 AA A
TP00461100	215/45R17	91W XL	BSW	24.5	8.4	7.0-(7.0)-8.0	10/32	1356	500 AA A
TP00428600	215/50R17	95W XL	BSW	25.4	8.9	6.0-(7.0)-7.5	10/32	1521	500 AA A
TP00460600	215/55R17	94W	BSW	26.3	9.0	6.0-(7.0)-7.5	10/32	1477	500 AA A
TP00461200	225/45R17	94W XL	BSW	24.8	8.9	7.0-(7.5)-8.5	10/32	1477	500 AA A
TP00428400	225/50R17	98W XL	BSW	25.9	9.2	6.0-(7.0)-8.0	10/32	1653	500 AA A
TP00466100	235/45R17	97W XL	BSW	25.2	9.3	7.5-(8.0)-9.0	10/32	1609	500 AA A
TP00428500	235/50R17	96W	BSW	26.1	9.8	6.5-(7.5)-8.5	10/32	1565	500 AA A
TP00466200	235/55R17	99W	BSW	27.1	9.8	6.5-(7.5)-8.5	10/32	1709	500 AA A
TP00466600	245/45R17	99W XL	BSW	25.6	9.6	7.5-(8.0)-9.0	10/32	1709	500 AA A
TP00465800	225/40R18	92Y XL	BSW	25.0	9.1	7.5-(8.0)-9.0	10/32	1389	500 AA A
TP00461300	225/45R18	95W XL	BSW	25.8	8.9	7.0-(7.5)-8.5	10/32	1521	500 AA A
TP00465900	225/50R18	95W	BSW	26.8	9.1	6.0-(7.0)-8.0	10/32	1521	500 AA A
TP00466000	235/40R18	95W XL	BSW	25.3	9.4	8.0-(8.5)-9.5	10/32	1521	500 AA A
TP00460800	235/45R18	98W XL	BSW	26.3	9.3	7.5-(8.0)-9.0	10/32	1653	500 AA A
TP00380100	235/50R18	101W XL	BSW	27.1	9.7	6.5-(7.5)-8.5	10/32	1819	500 AA A
TP00466300	245/40R18	97Y XL	BSW	25.6	9.7	8.0-(8.5)-9.5	10/32	1609	500 AA A
TP00460900	245/45R18	100W XL	BSW	26.5	9.6	7.5-(8.0)-9.0	10/32	1764	500 AA A
TP00460700	235/40R19	96W XL	BSW	26.3	9.4	8.0-(8.5)-9.5	10/32	1565	500 AA A
TP00466400	245/40R19	98W XL	BSW	26.7	9.7	8.0-(8.5)-9.5	10/32	1653	500 AA A
TP00466700	245/45R19	102W XL	BSW	27.6	9.5	7.5-(8.0)-9.0	10/32	1874	500 AA A
TP00466900	255/40R19	100Y XL	BSW	26.9	10.2	8.5-(9.0)-10.0	10/32	1764	500 AA A
TP00466500	245/40R20	99W XL	BSW	27.6	9.8	8.0-(8.5)-9.5	10/32	1709	500 AA A
TP00466800	245/45R20	103W XL	BSW	28.6	9.5	7.5-(8.0)-9.0	10/32	1929	500 AA A

VICTRA SPORT 5

PART #	SIZE	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	APPROVED Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	UTQG
TP00068900	225/45ZR17	94Y XL	BSW	25.0	8.9	7.5	9/32	1477	320 AA A
TP00069200	235/45ZR17	97Y XL	BSW	25.4	9.3	8.0	9/32	1609	320 AA A
TP00068500	245/40ZR17	95Y XL	BSW	24.7	9.7	8.5	9/32	1521	320 AA A
TP00071300	245/45ZR17	99Y XL	BSW	25.7	9.7	8.0	9/32	1709	320 AA A
TP00056300	215/40ZR18	89Y XL	BSW	24.8	8.5	7.5	9/32	1279	320 AA A
TP00070400	225/40ZR18	92Y XL	BSW	25.1	8.9	8.0	9/32	1389	320 AA A
TP00069000	225/45ZR18	95Y XL	BSW	25.9	8.9	7.5	9/32	1521	320 AA A
TP00238300	225/50ZR18	95Y	BSW	26.9	8.9	7.0	9/32	1521	320 AA A
TP00500500	235/40ZR18	95Y XL	BSW	25.4	9.3	8.0-(8.5)-9.5	9/32	1521	320 AA A
TP00494700	235/45ZR18	98Y XL	BSW	26.3	9.3	7.5-(8.0)-9.0	9/32	1653	320 AA A
TP00069600	245/35ZR18	92Y XL	BSW	24.8	9.7	8.5	9/32	1389	320 AA A
TP00087000	245/40ZR18	97Y	BSW	25.8	9.7	8.5	9/32	1609	320 AA A
TP00071400	245/45ZR18	100Y XL	BSW	26.7	9.7	8.0	9/32	1764	320 AA A
TP00069800	255/35ZR18	94Y XL	BSW	24.9	10.2	8.5-(9.0)-10.0	10/32	1477	320 AA A
TP00501500	255/40ZR18	99Y XL	BSW	26.0	9.5	8.0-(8.5)-9.0	10/32	1709	320 AA A
TP00070100	265/35ZR18	97Y XL	BSW	25.3	10.4	9.5	9/32	1609	320 AA A
TP00237900	275/35ZR18	99Y XL	BSW	25.6	10.8	9.5	9/32	1709	320 AA A
TP00069400	225/35ZR19	88Y XL	BSW	25.2	8.9	8.0	9/32	1235	320 AA A

VICTRA SPORT 5 continued

PART #	SIZE	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	APPROVED Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	UTQG
TP00503500	225/40ZR19	93Y XL	BSW	26.2	9.1	7.5-(8.0)-9.0	10/32	1433	320 AA A
TP00496700	225/45ZR19	96Y XL	BSW	27.0	8.8	7.0-(7.5)-8.5	10/32	1565	320 AA A
TP00503300	235/35ZR19	91Y XL	BSW	25.4	9.6	8.0-(8.5)-9.0	10/32	1356	320 AA A
TP00068400	235/40ZR19	96Y XL	BSW	26.4	9.3	8.5	9/32	1565	320 AA A
TP00503700	245/35ZR19	93Y XL	BSW	25.8	9.8	8.0-(8.5)-9.5	10/32	1433	320 AA A
TP00497200	245/40ZR19	98Y XL	BSW	27.7	9.4	7.5-(8.0)-9.0	10/32	1653	320 AA A
TP00071500	245/45ZR19	102Y XL	BSW	27.7	9.4	7.5-(8.0)-9.0	9/32	1874	320 AA A
TP00219300	245/55R19	103V	BSW	29.7	9.7	7.0-(7.5)-8.5	9/32	1929	320 AA A
TP00502800	255/35ZR19	99Y XL	BSW	26.0	10.0	8.5-(9.0)-10.0	9/32	1709	320 AA A
TP00501300	255/40ZR19	100Y XL	BSW	27.1	10.0	8.5-(9.0)-10.0	9/32	1764	320 AA A
TP00070200	265/35ZR19	98Y XL	BSW	26.3	10.4	9.0-(9.5)-10.5	9/32	1653	320 AA A
TP00503800	275/35ZR19	100Y XL	BSW	26.6	10.8	9.0-(9.5)-11.0	9/32	1764	320 AA A
TP00505000	275/40ZR19	105Y XL	BSW	27.7	10.8	9.0-(10.5)-11.0	9/32	2039	320 AA A
TP00272800	245/35ZR20	95Y XL	BSW	27.7	10.8	8.0-(9.5)-9.5	9/32	2149	320 AA A
TP00206100	245/40ZR20	99Y XL	BSW	27.7	9.7	8.5	9/32	1709	320 AA A
TP00202500	255/40ZR20	101Y XL	BSW	28.0	10.0	9.0	9/32	1819	320 AA A
TP00272700	275/30ZR20	97Y XL	BSW	26.5	10.8	9.0-(9.5)-10.0	9/32	1609	320 AA A
TP00299700	275/35ZR20	102Y XL	BSW	27.6	10.8	9.5	9/32	1874	320 AA A
SUV									
TP00283900	215/65R17	103V	BSW	28.0	8.5	6.5	9/32	1929	320 AA A
TP00125300	235/65ZR17	104W	BSW	29.1	9.4	6.5-(7.0)-8.5	10/32	2094	320 AA A
TP00125200	235/65ZR17	108W	BSW	29.1	9.4	6.5-(7.0)-8.5	10/32	2205	320 AA A
TP00131700	235/50ZR18	97Y	BSW	27.2	9.6	6.5-(7.5)-8.5	10/32	1609	320 AA A
TP00131600	235/55ZR18	100Y	BSW	28.1	9.6	6.5-(7.5)-8.5	9/32	2149	320 AA A
TP00496100	235/60R18	107W XL	BSW	29.2	9.3	6.5-(8.0)-8.5	9/32	2149	320 AA A
TP43035900	235/60ZR18	107W	BSW	29.2	9.4	6.5-(7.0)-8.5	10/32	2149	320 AA A
TP00125500	235/65ZR18	106W	BSW	30.1	9.4	6.5-(7.0)-8.5	10/32	2149	320 AA A
TP00126800	255/55ZR18	109Y	BSW	29.0	10.4	7.0-(8.0)-9.0	10/32	2149	320 AA A
TP00206300	235/45ZR19	99Y	BSW	27.3	9.3	7.5-(8.0)-9.0	10/32	2149	320 AA A
TP00124500	235/50ZR19	99W	BSW	28.4	9.4	6.5-(7.5)-8.5	10/32	2149	320 AA A
TP00131500	235/55ZR19	101Y	BSW	29.2	9.7	6.5-(7.5)-8.5	10/32	1819	320 AA A
TP00129800	255/45ZR19	104Y	BSW	28.0	10.0	8.0-(8.5)-9.5	10/32	1984	320 AA A
TP00124600	255/50ZR19	107Y	BSW	29.1	10.4	7.0-(8.0)-9.0	10/32	2149	320 AA A
TP00126900	255/55ZR19	111Y	BSW	30.0	10.4	7.0-(8.0)-9.0	10/32	2403	320 AA A
TP00130000	265/50ZR19	110Y	BSW	29.5	10.8	7.5-(8.5)-9.5	10/32	2149	320 AA A
TP00125000	275/45ZR19	108Y	BSW	28.7	10.8	8.5-(9.0)-10.5	10/32	2205	320 AA A
TP00125800	275/55ZR19	111Y	BSW	30.9	11.2	7.5-(8.5)-9.5	10/32	2403	320 AA A
TP00124000	235/55ZR20	102W	BSW	30.3	9.5	6.5-(7.5)-8.5	10/32	1874	320 AA A
TP00126700	245/45ZR20	103W	BSW	28.8	9.4	7.5-(8.0)-9.0	10/32	2149	320 AA A
TP00129900	255/45ZR20	105Y	BSW	29.1	10.0	8.0-(8.5)-9.5	10/32	2039	320 AA A
TP00124700	255/50ZR20	109Y	BSW	30.2	10.3	7.0-(8.0)-9.0	10/32	2271	320 AA A
TP00127000	255/55ZR20	110Y	BSW	31.1	10.4	7.0-(8.0)-9.0	10/32	2149	320 AA A
TP00130500	265/45ZR20	104Y	BSW	29.4	10.5	8.5-(9.0)-10.0	10/32	2149	320 AA A
TP00127500	275/40ZR20	106Y	BSW	28.7	10.8	9.0-(9.5)-11.0	10/32	2094	320 AA A
TP00125600	275/45ZR20	110Y	BSW	29.8	10.7	8.5-(9.0)-10.5	10/32	2149	320 AA A
TP00124800	295/40ZR20	110Y	BSW	29.3	11.8	10.0-(10.5)-11.5	10/32	2337	320 AA A
TP00130900	315/35ZR20	110W	BSW	28.8	12.4	10.5-(11.0)-12.5	8/32	2337	320 AA A
TP00207800	265/40ZR21	105Y	BSW	29.3	10.7	9.0-(9.5)-10.5	10/32	2149	320 AA A
TP00125700	275/45ZR21	110Y	BSW	30.8	10.7	8.5-(9.0)-10.5	10/32	2337	320 AA A
TP00125400	295/35ZR21	107Y	BSW	29.2	11.7	10.0-(10.5)-11.5	8/32	2149	320 AA A
TP00207900	305/35ZR24	112Y XL	BSW	32.4	12.4	10.0-(11.0)-11.5	8/32	2469	320 AA A


BRAVO HP-M3

PART #	SIZE	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	APPROVED Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	UTQG
TP00297300	195/55R16	87V	BSW	24.4	7.8	5.5-(6.0)-7.0	10/32	1201	700 A A
TP00119700	205/50R16	87V	BSW	24.2	8.3	5.5-(6.5)-7.5	10/32	1201	700 A A
TP00111300	205/55R16	91V	BSW	24.9	8.3	5.5-(6.5)-7.5	10/32	1356	700 A A
TP50745700	205/60R16	92V	BSW	25.7	8.2	5.5-(6.0)-7.5	10/32	1389	700 A A
TP40939900	205/65R16	95H	BSW	26.7	8.3	5.5-(6.0)-7.5	10/32	1521	700 A A
TP02297100	205/70R16	97H	BSW	27.4	8.1	5.0-(6.0)-7.0	10/32	1609	700 A A
TP00591000	215/55R16	93V	BSW	25.2	8.8	6.0-(7.0)-7.5	10/32	1433	700 A A
TP50747400	215/60R16	95V	BSW	26.1	8.7	6.0-(6.5)-7.5	10/32	1521	700 A A
TP00211500	215/65R16	98V	BSW	26.9	8.7	6.0-(6.5)-7.5	10/32	1653	700 A A
TP02298100	215/70R16	104H XL	BSW	27.9	8.8	5.5-(6.5)-7.0	10/32	1984	700 A A
TP01802000	225/50R16	92V	BSW	25.0	9.1	6.0-(7.0)-8.0	10/32	1389	700 A A
TP00268000	225/55R16	95V	BSW	25.7	9.1	6.0-(7.0)-8.0	10/32	1521	700 A A
TP00743300	225/60R16	98V	BSW	26.6	9.1	6.0-(6.5)-8.0	10/32	1653	700 A A
TP00074500	225/65R16	100V	BSW	27.6	9.2	6.0-(6.5)-8.0	10/32	1764	700 A A
TP02299100	225/70R16	107H XL	BSW	28.5	9.0	6.0-(6.5)-7.5	10/32	2149	700 A A
TP41011800	235/60R16	100V	BSW	27.1	9.6	6.5-(7.0)-8.5	10/32	1764	700 A A
TP02319100	235/70R16	109H XL	BSW	29.0	9.4	6.0-(7.0)-8.0	10/32	2271	700 A A
TP00074200	205/45R17	88V XL	BSW	24.3	8.1	6.5-(7.0)-7.5	10/32	1235	700 A A
TP42389700	205/50R17	93V XL	BSW	25.2	8.3	5.5-(6.5)-7.5	10/32	1433	700 A A
TP00143200	215/45R17	91V XL	BSW	24.7	8.3	7.0-(7.0)-8.0	10/32	1356	700 A A
TP42392800	215/50R17	95V XL	BSW	25.6	8.9	6.0-(7.0)-7.5	10/32	1521	700 A A
TP50753700	215/55R17	94V	BSW	26.4	8.9	6.0-(7.0)-7.5	10/32	1477	700 A A
TP02308100	215/60R17	100V XL	BSW	27.2	8.7	6.0-(6.5)-7.5	10/32	1764	700 A A
TP42418000	215/65R17	99V	BSW	28.0	8.7	6.0-(6.5)-7.5	10/32	1709	700 A A
TP00225000	225/45R17	91V	BSW	24.9	8.9	7.0-(7.5)-8.5	10/32	1356	700 A A
TP50718500	225/50R17	94V	BSW	26.0	9.1	6.0-(7.0)-8.0	10/32	1477	700 A A
TP00301300	225/55R17	101V XL	BSW	26.9	9.0	6.0-(7.0)-8.0	10/32	1819	700 A A
TP41116100	225/60R17	99H	BSW	27.7	9.1	6.0-(6.5)-8.0	10/32	1709	700 A A
TP00003800	225/65R17	106V XL	BSW	28.7	9.2	6.0-(6.5)-8.0	10/32	2094	700 A A
TP42011500	235/45ZR17	94W	BSW	25.3	9.4	7.5-(8.0)-9.0	10/32	1477	700 A A
TP42003700	235/50R17	100V XL	BSW	26.4	9.4	6.5-(7.5)-8.5	10/32	1764	700 A A
TP00003000	235/55R17	103V XL	BSW	27.2	9.4	6.5-(7.5)-8.5	10/32	1929	700 A A
TP00002600	235/60R17	106V XL	BSW	28.1	9.5	6.5-(7.0)-8.5	10/32	2094	700 A A
TP00002400	235/65R17	108V XL	BSW	29.0	9.4	6.5-(7.0)-8.5	10/32	2205	700 A A
TP00074100	245/40R17	95V XL	BSW	24.8	9.8	8.0-(8.5)-9.5	9/32	1521	700 A A
TP00077100	245/45R17	99V XL	BSW	25.6	9.6	7.5-(8.0)-9.0	10/32	1709	700 A A
TP00010700	245/65R17	111V XL	BSW	29.7	9.9	7.0-(7.0)-8.5	10/32	2403	700 A A
TP00088200	255/40R17	98V XL	BSW	25.1	10.2	8.5-(9.0)-10.0	10/32	1653	700 A A
TP43127000	215/45ZR18	93W XL	BSW	25.7	8.4	7.0-(7.0)-8.0	10/32	1433	700 A A
TP02311100	215/55R18	99V XL	BSW	27.3	8.9	6.0-(7.0)-7.5	10/32	1709	700 A A
TP00121700	225/40ZR18	92W XL	BSW	25.1	9.2	7.5-(8.0)-9.0	10/32	1389	700 A A
TP01691200	225/45ZR18	95W XL	BSW	26.0	8.9	7.0-(7.5)-8.5	10/32	1521	700 A A
TP50809000	225/50ZR18	99W XL	BSW	27.0	9.0	6.0-(7.0)-8.0	10/32	1709	700 A A
TP00791500	225/55R18	98V	BSW	27.7	9.0	6.0-(7.0)-8.0	10/32	1653	700 A A
TP43028900	225/60ZR18	100W	BSW	28.8	9.1	6.0-(6.5)-8.0	10/32	1764	700 A A
TP00088800	235/40ZR18	95W XL	BSW	25.4	9.6	8.0-(8.5)-9.5	10/32	1521	700 A A
TP00906500	235/45ZR18	94W	BSW	26.4	9.4	7.5-(8.0)-9.0	10/32	1477	700 A A
TP00653700	235/50ZR18	101W XL	BSW	27.4	9.4	6.5-(7.5)-8.5	10/32	1819	700 A A
TP00032000	235/55R18	100V	BSW	28.1	9.6	6.5-(7.5)-8.5	10/32	1764	700 A A
TP02313100	235/60R18	107V XL	BSW	29.1	9.6	6.5-(7.0)-8.5	10/32	2149	700 A A
TP02312100	235/65R18	110V XL	BSW	30.2	9.7	6.5-(7.0)-8.5	10/32	2337	700 A A
TP00075100	245/40ZR18	97W XL	BSW	25.7	9.7	8.0-(8.5)-9.5	10/32	1609	700 A A
TP01047400	245/45R18	100V XL	BSW	26.8	9.3	7.5-(8.0)-9.0	10/32	1764	700 A A
TP00074400	245/55ZR18	103W	BSW	28.6	9.8	7.0-(7.5)-8.5	10/32	1929	700 A A

BRAVO HP-M3 continued

PART #	SIZE	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	APPROVED Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	UTQG
TP00004800	245/60R18	105V	BSW	29.6	9.8	7.0-(7.0)-8.5	10/32	2039	700 A A
TP00172200	255/35ZR18	94W XL	BSW	25.0	10.2	8.5-(9.0)-10.0	10/32	1477	700 A A
TP00088700	255/40ZR18	99W XL	BSW	26.1	10.2	8.5-(9.0)-10.0	10/32	1709	700 A A
TP00074300	255/45ZR18	103W XL	BSW	27.1	10.1	8.0-(8.5)-9.5	10/32	1929	700 A A
TP00003900	255/55R18	109V XL	BSW	28.9	10.4	7.0-(8.0)-9.0	10/32	2271	700 A A
TP00014200	255/65R18	115V XL	BSW	31.1	10.5	7.0-(7.5)-9.0	10/32	2679	700 A A
TP00001600	265/60R18	114V XL	BSW	30.6	10.8	7.5-(8.0)-9.5	10/32	2601	700 A A
TP00074800	225/40ZR19	93W XL	BSW	26.1	9.1	7.5-(8.0)-9.0	10/32	1433	700 A A
TP00074700	225/45ZR19	96W XL	BSW	27.0	8.9	7.0-(7.5)-8.5	10/32	1565	700 A A
TP00004500	225/55R19	99V	BSW	28.7	9.2	6.0-(7.0)-8.0	10/32	1709	700 A A
TP00085600	235/40ZR19	96W XL	BSW	26.5	9.6	8.0-(8.5)-9.5	10/32	1565	700 A A
TP00088300	235/50ZR19	103W XL	BSW	28.5	9.6	6.5-(7.5)-8.5	10/32	1929	700 A A
TP43154200	235/55R19	101V	BSW	29.3	9.5	6.5-(7.5)-8.5	10/32	1819	700 A A
TP01992100	245/40ZR19	98W XL	BSW	26.7	9.7	8.0-(8.5)-9.5	10/32	1653	700 A A
TP02010100	245/45ZR19	98W	BSW	27.6	9.6	7.5-(8.0)-9.0	10/32	1653	700 A A
TP00003500	245/55R19	103V	BSW	29.7	9.8	7.0-(7.5)-8.5	10/32	1929	700 A A
TP00088600	255/40ZR19	100W XL	BSW	27.2	10.1	8.5-(9.0)-10.0	10/32	1764	700 A A
TP00074900	255/45ZR19	104W XL	BSW	28.1	10.0	8.0-(8.5)-9.5	10/32	1984	700 A A
TP02314100	255/50R19	107V XL	BSW	29.2	10.2	7.0-(8.0)-9.0	10/32	2149	700 A A
TP00073900	255/55ZR19	111W XL	BSW	30.0	10.3	7.0-(8.0)-9.0	10/32	2403	700 A A
TP00004000	255/60R19	113V XL	BSW	31.1	10.4	7.0-(7.5)-9.0	10/32	2535	700 A A
TP00088500	275/40ZR19	105W XL	BSW	27.8	10.8	9.0-(9.5)-11.0	10/32	2039	700 A A
TP00004700	235/55R20	105V XL	BSW	30.1	9.5	6.5-(7.5)-8.5	10/32	2039	700 A A
TP00074600	245/40ZR20	99W XL	BSW	27.8	9.7	8.0-(8.5)-9.5	10/32	1709	700 A A
TP02004100	245/45ZR20	99W	BSW	28.7	9.5	7.5-(8.0)-9.0	10/32	1709	700 A A
TP00005900	245/50R20	102V	BSW	29.9	9.7	7.0-(7.5)-8.5	9/32	1874	700 A A
TP02317100	255/45ZR20	105W XL	BSW	28.9	10.2	8.0-(8.5)-9.5	10/32	2039	700 A A
TP00012200	255/50R20	109V XL	BSW	30.1	10.3	7.0-(8.0)-9.0	10/32	2271	700 A A
TP00015500	255/55R20	110V XL	BSW	31.1	10.4	7.0-(8.0)-9.0	10/32	2337	700 A A
TP00002900	265/50R20	111V XL	BSW	30.4	10.7	7.5-(8.5)-9.5	10/32	2403	700 A A
TP00088400	275/40ZR20	106W XL	BSW	28.8	10.8	9.0-(9.5)-11.0	10/32	2094	700 A A
TP00094400	275/45ZR20	110W XL	BSW	29.7	10.8	8.5-(9.0)-10.5	10/32	2337	700 A A



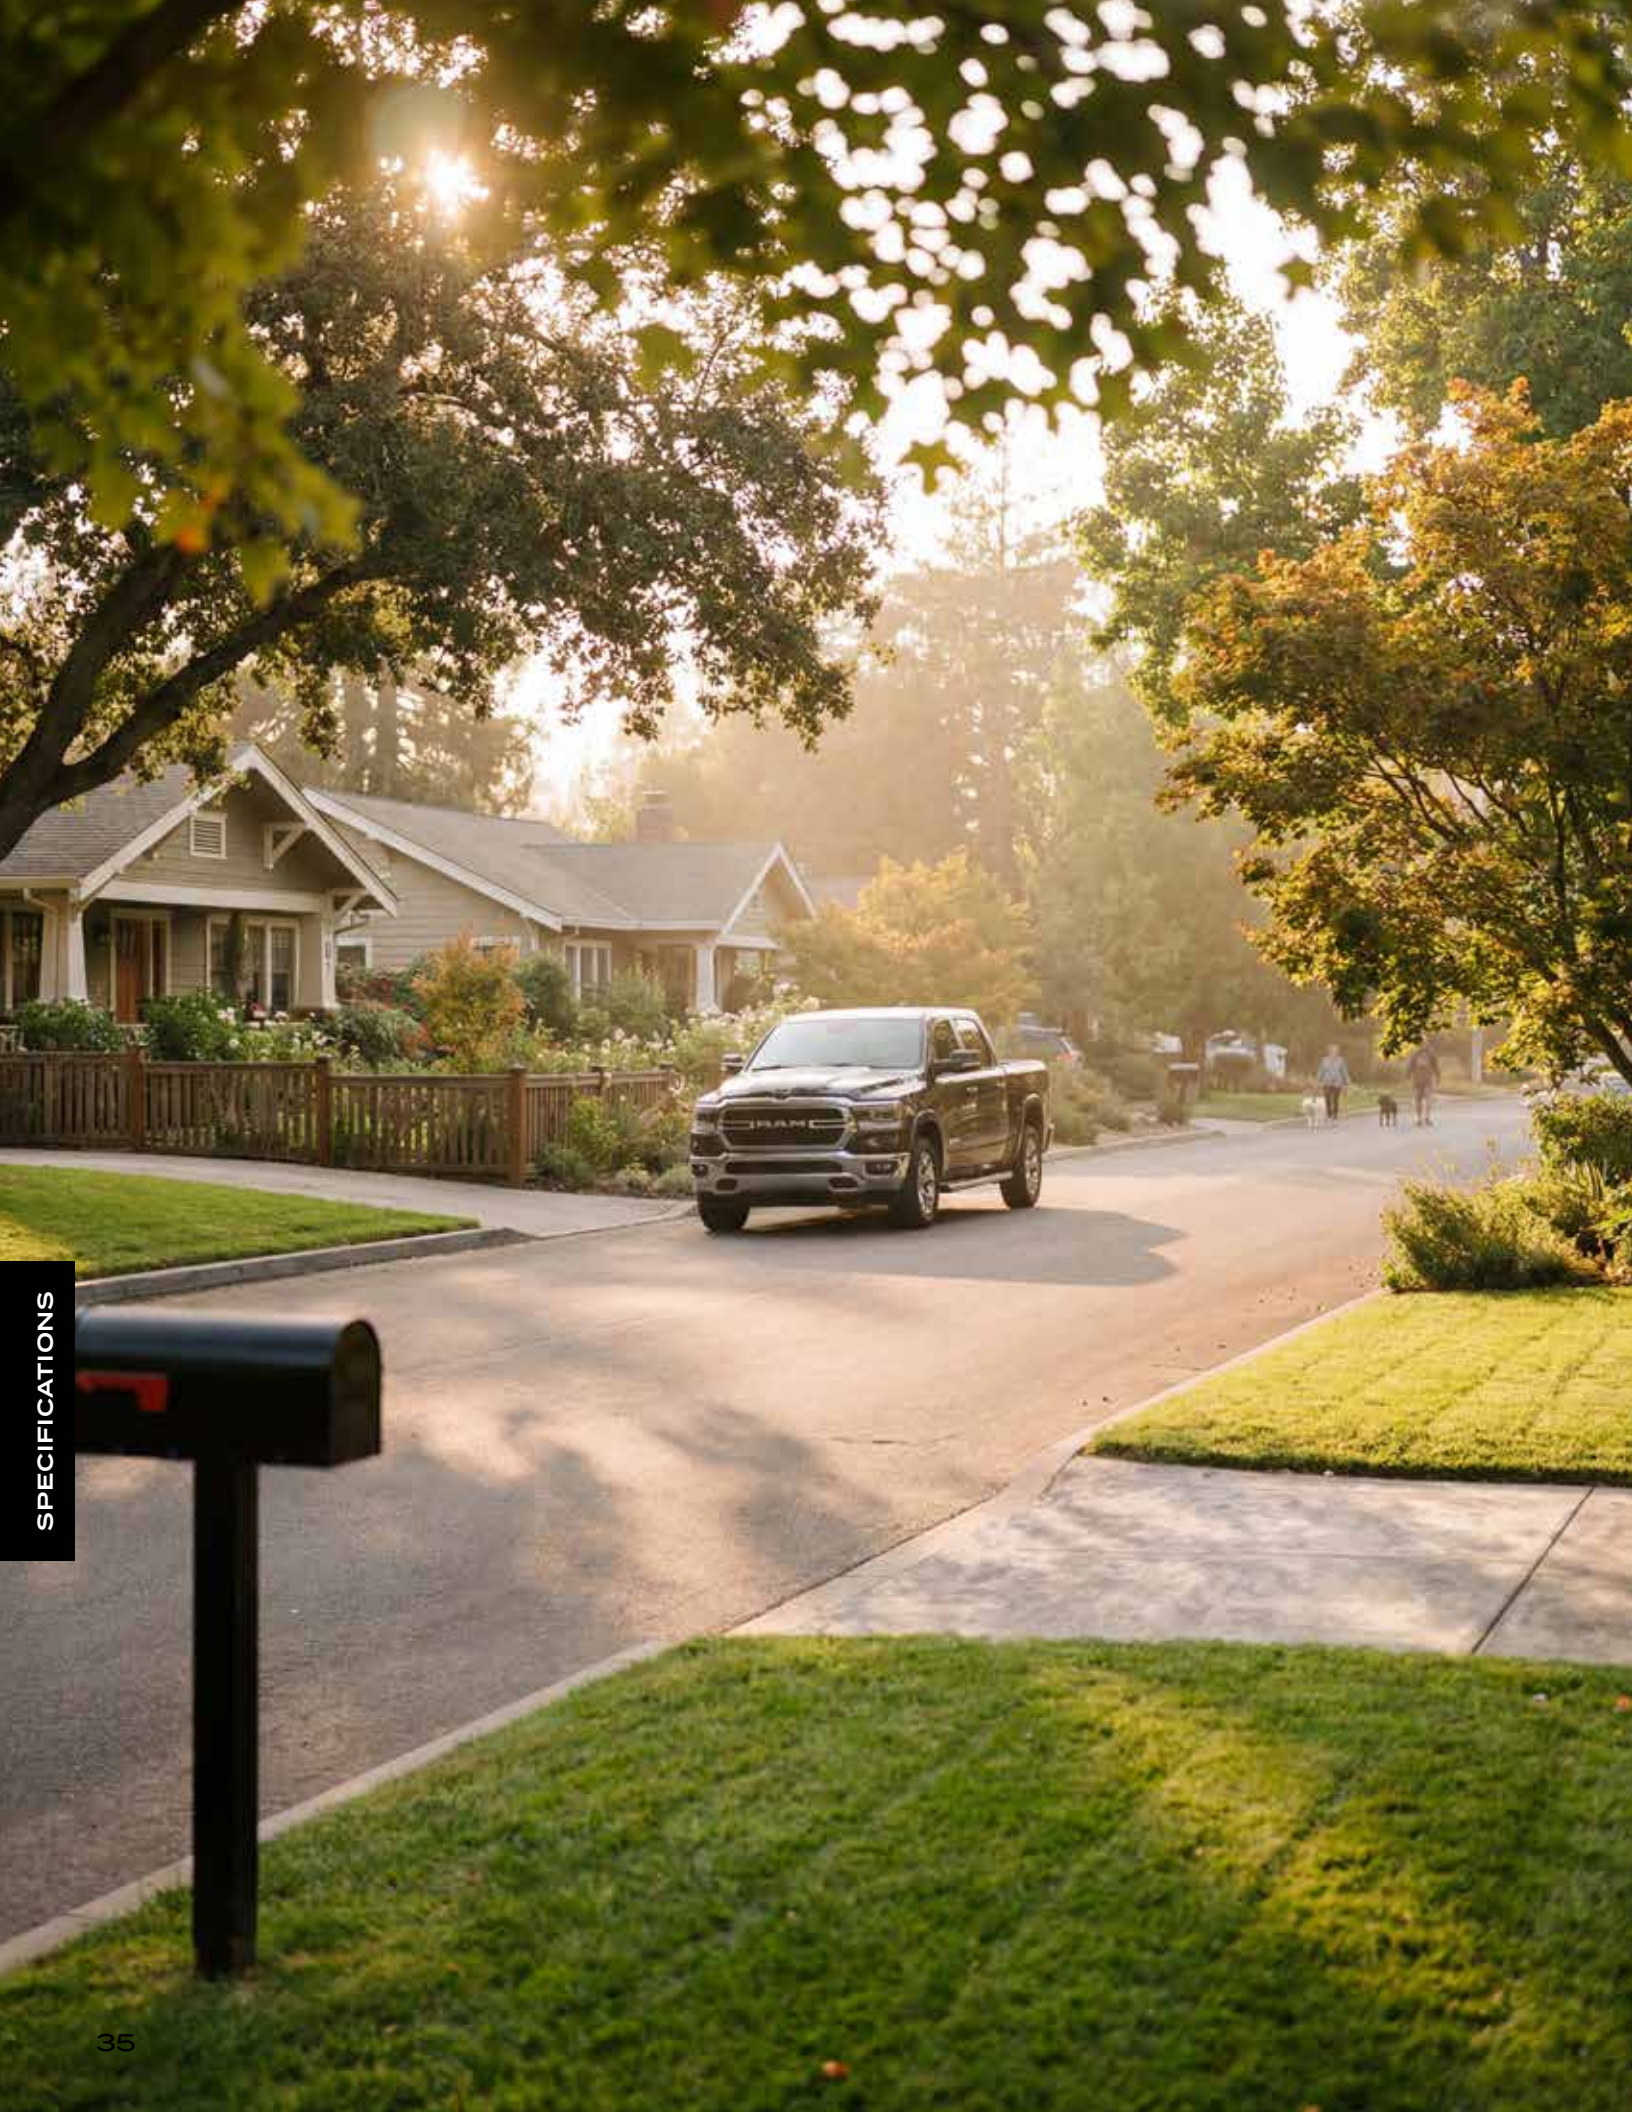

RAZR HT

PART #	SIZE	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	APPROVED Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	UTQG
TP00442200	235/75R15	109T XL	BSW	29.0	9.2	6.0-(6.5)-8.0	12/32	2271	700 A B
TP00368200	215/70R16	100H	BSW	28.1	8.8	5.5-(6.5)-7.0	12/32	1764	700 A A
TP00386600	225/70R16	103T	BSW	28.6	9.0	6.0-(6.5)-7.5	12/32	1929	700 A B
TP00487000	235/75R16	112T XL	BSW	30.0	9.0	6.0-(6.5)-8.0	12/32	2469	700 A B
TP00377700	235/70R16	109T XL	BSW	29.2	9.4	6.0-(7.0)-8.0	12/32	2271	700 A B
TP00442100	245/75R16	111T	BSW	30.6	9.8	6.5-(7.0)-8.0	12/32	2403	700 A B
TP00377200	245/70R16	111T XL	BSW	29.7	9.8	6.5-(7.0)-8.0	12/32	2403	700 A B
TP00385900	255/70R16	111T	BSW	30.2	10.2	6.5-(7.5)-8.5	12/32	2403	700 A B
TP00441900	265/75R16	116T	BSW	31.9	10.5	7.0-(7.5)-9.0	12/32	2756	700 A B
TP00377800	265/70R16	112T	BSW	30.7	10.8	7.0-(8.0)-9.0	12/32	2469	700 A B
TP00386700	275/70R16	114T	BSW	31.3	11.0	7.0-(8.0)-9.0	12/32	2601	700 A B
TP00377500	225/65R17	102H	BSW	28.7	8.9	6.0-(6.5)-8.0	12/32	1874	700 A A
TP00441800	235/75R17	109T	BSW	31.0	9.2	6.0-(6.5)-8.0	12/32	2271	700 A B
TP00487100	235/60R17	102H	BSW	28.1	9.3	6.5-(7.0)-8.5	12/32	1874	700 A A
TP00386800	235/65R17	108H XL	BSW	29.3	9.4	6.5-(7.0)-8.5	12/32	2205	700 A A
TP00385500	245/70R17	110T	BSW	30.7	9.7	6.5-(7.0)-8.0	12/32	2337	700 A B
TP00377600	245/65R17	111H XL	BSW	29.7	9.6	7.0-(7.0)-8.5	12/32	2403	700 A A
TP00441700	255/70R17	112T	BSW	31.3	10.3	6.5-(7.5)-8.5	11/32	2469	700 A B
TP00487600	255/65R17	110T	BSW	30.2	10.1	7.0-(7.5)-9.0	12/32	2337	700 A B
TP00377400	265/65R17	112T	BSW	30.8	10.7	7.5-(8.0)-9.5	12/32	2469	700 A B
TP00363200	265/70R17	115T	BSW	31.9	11.0	7.0-(8.0)-9.0	12/32	2679	700 A B
TP00427000	225/60R18	100H	BSW	28.7	8.8	6.0-(6.5)-8.0	12/32	1764	700 A A
TP00441600	235/65R18	110H XL	BSW	30.2	9.3	6.5-(7.0)-8.5	11/32	2337	700 A A
TP00487200	235/60R18	107V XL	BSW	29.3	9.3	6.5-(7.0)-8.5	12/32	2149	700 A A
TP00376200	245/60R18	105H	BSW	29.7	9.7	7.0-(7.0)-8.5	12/32	2039	700 A A
TP00385600	255/65R18	115H XL	BSW	31.2	10.2	7.0-(7.5)-9.0	12/32	2679	700 A A
TP00441500	265/65R18	114H	BSW	31.6	10.7	7.5-(8.0)-9.5	12/32	2601	700 A A
TP00377300	265/60R18	114H XL	BSW	30.6	10.6	7.5-(8.0)-9.5	12/32	2601	700 A A
TP00385700	275/65R18	116H	BSW	32.3	11.1	7.5-(8.0)-9.5	12/32	2756	700 A A
TP00386200	285/60R18	116T	BSW	31.5	11.3	8.0-(8.5)-10.0	12/32	2756	700 A B
TP00368000	245/55R19	103H	BSW	29.8	10.0	7.0-(7.5)-8.5	12/32	1929	700 A A
TP00487300	255/55R20	110H XL	BSW	31.1	10.2	7.0-(8.0)-9.0	12/32	2337	700 A A
TP00487400	255/50R20	109H XL	BSW	30.3	10.0	7.0-(8.0)-9.0	12/32	2271	700 A A
TP00441400	265/50R20	111T XL	BSW	30.4	10.7	7.5-(8.5)-9.5	12/32	2403	700 A B
TP00368100	275/55R20	117H XL	BSW	32.1	11.1	7.5-(8.5)-9.5	12/32	2833	700 A A
TP00385800	275/60R20	115H	BSW	33.2	10.9	7.5-(8.0)-9.5	12/32	2679	700 A A
TP00368300	285/50R20	112V	BSW	31.4	11.6	8.0-(9.0)-10.0	12/32	2469	700 A A
TP00487800	275/50R22	111H	BSW	33.0	10.8	7.5-(8.5)-9.5	12/32	2403	700 A A
TP00487500	285/45R22	114H XL	BSW	32.2	11.0	9.0-(9.5)-10.5	12/32	2601	700 A A
									(psi)
TL00114800	LT225/75R16	115/112S 10PR	BSW	29.4	8.7	6.0-(6.0)-7.5	13/32	2680	80
TL00114900	LT235/85R16	120/116S 10PR	BSW	31.8	9.4	6.0-(6.5)-7.5	14/32	3042	80
TL00115000	LT245/75R16	120/116S 10PR	BSW	30.5	9.8	6.5-(7.0)-8.0	13/32	3042	80
TL00128800	LT235/80R17	120/117R 10PR	BSW	31.9	9.3	6.0-(6.5)-8.0	15/32	3085	80
TL00137200	LT245/75R17	121/118S 10PR	BSW	31.7	9.8	6.5-(7.0)-8.0	15/32	3195	80
TL00128900	LT265/70R17	123/120T 10PR	BSW	31.8	10.7	7.0-(8.0)-9.0	15/32	3415	80
TL00137300	LT275/65R18	123/120S 10PR	BSW	32.5	10.7	8.0-(8.0)-9.5	15/32	3415	80
TL00137000	LT275/70R18	125/122S 10PR	BSW	33.4	10.9	7.0-(8.0)-9.0	15/32	3640	80
TL00137400	LT275/65R20	126/123R 10PR	BSW	34.5	10.7	8.0-(8.0)-9.5	15/32	3750	80

RAZR AT-S

PART #	SIZE	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	APPROVED Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	UTQG
TP00420900	235/75R15	109T XL	OWL	29.0	9.4	6.0-(6.5)-8.0	12/32	2271	660 A B
TP00462600	235/70R16	106T	RBL	29.1	9.7	6.0-(7.0)-8.0	13.1/32	2094	660 A B
TP00420700	245/70R16	111T XL	OWL	29.6	9.8	6.5-(7.0)-8.0	13/32	2403	660 A B
TP00420600	255/70R16	111T	RBL	30.1	10.0	6.5-(7.5)-8.5	13/32	2403	660 A B
TP00420300	265/70R16	112T	OWL	30.8	10.7	7.0-(8.0)-9.0	13/32	2469	660 A B
TP00490900	225/60R17	103H XL	RBL	27.8	8.9	6.0-(6.5)-8.0	13.4/32	1929	660 A A
TP00420500	225/65R17	102T	RBL	28.5	9.0	6.0-(6.5)-8.0	13/32	1874	660 A B
TP00462500	235/65R17	108H XL	RBL	29.1	9.5	6.5-(7.0)-8.5	13/32	2205	660 A A
TP00421300	245/65R17	111T XL	RBL	29.8	9.8	7.0-(7.0)-8.5	12/32	2403	660 A B
TP00462700	255/65R17	110H	RBL	30.1	10.4	7.0-(7.5)-9.0	13.1/32	2337	660 A A
TP00436800	255/70R17	112T	RBL	31.2	10.4	6.5-(7.5)-8.5	13/32	2469	660 A B
TP00391800	265/65R17	112T	RBL	30.7	10.9	7.5-(8.0)-9.5	11/32	2469	660 A B
TP00462400	265/70R17	115T	RBL	31.8	10.9	7.0-(8.0)-9.0	13.3/32	2679	660 A B
TP00490500	285/70R17	116T	RBL	32.9	11.8	7.5-(8.5)-9.5	13.3/32	2756	660 A B
TP00488000	245/60R18	109H XL	RBL	29.6	9.8	7.0-(7.0)-8.5	13.2/32	2271	660 A A
TP00420800	265/60R18	114T XL	OWL	30.5	10.8	7.5-(8.0)-9.5	13/32	2601	660 A B
TP00490400	275/65R18	116T	RBL	32.1	11.1	7.5-(8.0)-9.5	13.4/32	2756	660 A B
TP00490800	265/50R20	111V XL	RBL	30.5	10.8	7.5-(8.5)-9.5	13.5/32	2403	660 A A
TP00462800	265/60R20	115T XL	RBL	32.4	10.8	7.5-(8.0)-9.5	13.2/32	2679	660 A B
TP00421500	275/55R20	117T XL	RBL	32.1	11.0	7.5-(8.5)-9.5	12/32	2833	660 A B
TP00490600	275/60R20	116H XL	RBL	33.2	11.0	7.5-(8.0)-9.5	13.2/32	2756	660 A A
TP00490300	285/45R22	114H XL	BSW	32.2	11.0	9.0-(9.5)-10.5	13.4/32	2601	660 A A
									(psi)
TL00132000	LT235/75R15	104/101S 6PR	RBL	28.9	9.3	6.0-(6.5)-8.0	15.6/32	S1985/D1820	50
TL00139200	LT225/75R16	115/112S 10PR	RBL	29.3	8.7	6.0-(6.0)-7.5	15.7/32	S2680/D2470	80
TL00132100	LT245/75R16	120/116S 10PR	RBL	30.5	10.0	6.5-(7.0)-8.0	15.3/32	S3042/D2778	80
TL00132200	LT265/70R16	121/118S 10PR	RBL	30.7	10.8	7.0-(8.0)-9.0	15.7/32	S3195/D2910	80
TL00132300	LT265/75R16	123/120R 10PR	RBL	31.7	10.7	7.0-(7.5)-9.0	15.7/32	S3415/D3085	80
TL00139600	LT245/75R17	121/118S 10PR	RBL	31.5	9.8	6.5-(7.0)-8.0	15.1/32	S3195/D2910	80
TL00127500	LT265/65R17	120/117S 10PR	RBL	30.6	10.8	8.0-(8.0)-9.5	15/32	S3085/D2835	80
TL00149000	LT265/70R17	123/120S 10PR	RBL	31.7	10.8	7.0-(8.0)-9.0	15/32	S3415/D3085	80
TL00127400	LT285/70R17	126/123S 10PR	RBL	33.0	11.4	7.5-(8.5)-9.5	15/32	S3750/D3415	80
TL00127600	LT265/60R18	119/116S 10PR	RBL	30.9	10.5	8.0-(8.0)-9.5	15.2/32	S3000/D2755	80
TL00139400	LT275/70R18	125/122S 10PR	RBL	33.5	10.9	7.0-(8.0)-9.0	15.8/32	S3640/D3305	80
TL00129000	LT285/65R18	121/118R 8PR	RBL	33.0	11.5	8.5-(8.5)-10.0	15.4/32	S3195/D2910	65
TL00139500	LT275/65R20	126/123S 10PR	RBL	34.3	11.0	8.0-(8.0)-9.5	15.8/32	S3750/D3415	80
TL00131900	30X9.50R15LT	104S 6PR	RBL	29.6	9.6	6.0-(7.5)-8.0	15.7/32	1985	50
TL00123300	31X10.50R15LT	109S 6PR	OWL	30.4	10.9	7.0-(8.5)-9.0	15/32	2270	50

RAZR AT

PART #	SIZE	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	APPROVED Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	UTQG
TP00405600	245/75R16	115S XL	RBL	30.4	9.9	6.5-(7.5)-8.0	12/32	2679	600 A B
TP00405200	255/70R16	111T	RBL	30.1	10.0	6.5-(7.5)-8.5	12/32	2403	600 A B
TP00251600	265/70R16	112T	RBL	30.7	10.7	7.0-(8.0)-9.0	12/32	2469	600 A B
TP00405700	265/75R16	116T	RBL	31.6	10.5	7.0-(7.5)-9.0	12/32	2756	600 A B
TP00250800	225/60R17	103H XL	RBL	27.8	8.8	6.0-(6.5)-8.0	12/32	1929	600 A B
TP00251000	225/65R17	106H XL	RBL	28.7	8.8	6.0-(6.5)-8.0	12/32	2094	600 A B

RAZR AT continued

PART #	SIZE	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	APPROVED Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
TP00250600	235/65R17	108H XL	RBL	29.3	9.3	6.5-(7.0)-8.5	12/32	2205	600 A B
TP00251800	245/65R17	111T XL	RBL	29.8	9.6	7.0-(7.0)-8.5	12/32	2403	600 A B
TP00250700	265/65R17	112T	RBL	30.8	10.6	7.5-(8.0)-9.5	12/32	2469	600 A B
TP00250900	265/70R17	116T XL	RBL	31.8	10.6	7.0-(8.0)-9.0	12/32	2756	600 A B
TP00251700	P285/70R17	117T	RBL	32.6	11.6	7.5-(8.5)-9.5	12/32	2833	600 A B
TP00405300	255/70R18	116T XL	RBL	32.1	10.3	6.5-(7.5)-8.5	12/32	2756	600 A B
TP00405500	265/60R18	110T	RBL	30.3	10.7	7.5-(8.0)-9.5	12/32	2337	600 A B
TP00405100	265/65R18	114T	RBL	31.6	10.7	7.5-(8.0)-9.5	12/32	2601	600 A B
TP00405400	275/65R18	116T	RBL	32.1	11.1	7.5-(8.0)-9.5	12/32	2756	600 A B
TP00251900	265/50R20	111S XL	RBL	30.5	10.6	7.5-(8.5)-9.5	12/32	2403	600 A B
TP00252000	275/55R20	117T XL	RBL	32.0	11.1	7.5-(8.5)-9.5	12/32	2833	600 A B
TP00252100	275/60R20	116S XL	RBL	33.2	10.8	7.5-(8.0)-9.5	12/32	2756	600 A B
									(psi)
TL00068000	LT245/75R16*	120/116S 10PR	RBL	30.6	10.0	6.5-(7.0)-8.0	15/32	S3042/D2778	80
TL00065000	LT265/70R16*	121/118S 10PR	RBL	30.7	10.9	7.0-(8.0)-9.0	15/32	S3195/D2910	80
TL00066700	LT265/75R16*	123/120R 10PR	RBL	31.7	10.8	7.0-(7.5)-9.0	15/32	S3415/D3085	80
TL00068900	LT285/75R16*	126/123R 10PR	RBL	32.9	11.5	7.5-(8.0)-9.5	15/32	S3750/D3415	80
TL00119900	LT245/75R17*	121/118S 10PR	RBL	31.6	9.8	6.5-(7.0)-8.0	15/32	S3195/D2910	80
TL00064800	LT265/65R17*	120/117S 10PR	RBL	30.6	10.8	8.0-(8.0)-9.5	15/32	S3085/D2835	80
TL00002500	LT265/70R17*	121/118S 10PR	RBL	31.8	10.8	7.0-(8.0)-9.0	15/32	S3195/D2910	80
TL00049200	LT285/70R17*	121/118S 10PR	RBL	32.9	11.7	7.5-(8.5)-9.5	15/32	S3195/D2910	80
TL00049600	LT295/70R17*	121/118R 10PR	RBL	33.5	12.2	7.5-(8.5)-10.0	15/32	S3195/D2910	80
TL00064600	LT265/60R18*	119/116S 10PR	RBL	30.8	10.8	8.0-(8.0)-9.5	15/32	S3000/D2755	80
TL00049500	LT265/70R18*	124/121S 10PR	RBL	32.9	10.9	7.0-(8.0)-9.0	15/32	S3525/D3195	80
TL00068300	LT275/65R18*	123/120S 10PR	RBL	32.4	10.9	8.0-(8.0)-9.5	15/32	S3415/D3085	80
TL00049400	LT275/70R18*	125/122S 10PR	RBL	33.3	11.1	7.0-(8.0)-9.0	15/32	S3640/D3305	80
TL00070300	LT285/65R18*	125/122S 10PR	RBL	32.8	11.5	8.5-(8.5)-10.0	15/32	S3640/D3305	80
TL00070200	LT285/75R18*	129/126S 10PR	RBL	35.0	11.5	7.5-(8.0)-9.5	15/32	S4080/D3750	80
TL00049300	LT295/70R18*	129/126S 10PR	RBL	34.5	12.0	7.5-(8.5)-10.0	15/32	S4080/D3750	80
TL00070100	LT265/60R20*	121/118S 10PR	RBL	32.8	10.8	8.0-(8.0)-9.5	15/32	S3195/D2910	80
TL00121600	LT275/55R20*	120/117T 10PR	RBL	32.0	10.9	8.0-(8.5)-9.5	15/32	S3085/D2835	80
TL00070000	LT275/60R20*	123/120S 10PR	RBL	33.6	11.0	8.0-(8.0)-9.5	15/32	S3415/D3085	80
TL00069900	LT275/65R20*	126/123S 10PR	RBL	34.2	11.1	8.0-(8.0)-9.5	15/32	S3750/D3415	80
TL00069800	LT285/55R20*	122/119S 10PR	RBL	32.7	11.5	8.5-(9.0)-10.0	15/32	S3305/D3000	80
TL00069700	LT285/65R20*	127/124S 10PR	RBL	34.7	11.6	8.5-(8.5)-10.0	15/32	S3860/D3525	80
TL00069100	LT295/55R20*	123/120S 10PR	RBL	33.0	12.0	8.5-(9.5)-10.5	15/32	S3415/D3085	80
TL00069600	LT295/60R20*	126/123S 10PR	RBL	34.6	11.8	8.5-(8.5)-10.5	15/32	S3750/D3415	80
TL00069500	LT295/65R20*	129/126S 10PR	RBL	35.2	11.9	8.5-(8.5)-10.5	15/32	S4080/D3750	80
TL00121700	LT305/55R20*	121/118S 10PR	RBL	33.1	12.4	9.0-(9.5)-11.0	15/32	S3195/D2910	80
TL00069400	LT285/50R22*	121/118R 10PR	RBL	33.7	11.4	8.5-(9.0)-10.0	15/32	S3195/D2910	80
TL00069200	LT285/55R22*	124/121R 10PR	RBL	34.8	11.6	8.5-(9.0)-10.0	15/32	S3525/D3195	80
TL00069300	31X10.50R15LT*	109Q 6PR	RBL	30.4	10.8	7.0-(8.5)-9.0	15/32	2270	50
TL00064700	35X11.50R17LT*	121R 10PR	RBL	34.7	12.1	7.5-(9.0)-10.0	15/32	3195	80
TL00050000	35X12.50R17LT*	121R 10PR	RBL	34.7	13.1	8.0-(10.0)-10.5	15/32	3195	65
TL00101100	37X12.50R17LT*	128R 10PR	RBL	36.5	13.3	8.0-(10.0)-10.5	15/32	3970	65
TL00068600	33X12.50R18LT*	122Q 12PR	RBL	32.8	12.7	8.5-(10.0)-11.0	15/32	3305	80
TL00050100	35X12.50R18LT*	128Q 12PR	RBL	34.8	12.9	8.5-(10.0)-11.0	15/32	3970	80
TL00065600	33X12.50R20LT*	119Q 12PR	RBL	32.8	12.4	8.5-(10.0)-11.0	15/32	3000	80
TL00066600	35X12.50R20LT*	125Q 12PR	RBL	34.8	12.8	8.5-(10.0)-11.0	15/32	3640	80
TL00049900	37X12.50R20LT*	128R 12PR	RBL	36.7	12.9	8.5-(10.0)-11.0	15/32	3970	80
TL00065200	37X13.50R20LT*	128Q 12PR	RBL	36.8	14.0	9.5-(11.0)-12.0	15/32	3970	80
TL00065400	40X13.50R20LT*	128Q 10PR	RBL	39.8	14.1	9.0-(11.0)-11.5	15/32	3970	65
TL00065300	35X12.50R22LT*	121Q 12PR	RBL	34.8	12.4	8.5-(10.0)-11.0	15/32	3195	80
TL00066500	37X12.50R22LT*	127Q 12PR	RBL	36.9	12.7	8.5-(10.0)-11.0	15/32	3860	80
TL00065500	37X13.50R22LT*	128Q 12PR	RBL	37.0	13.8	9.5-(11.0)-12.0	15/32	3970	80

RAZR MT

PART #	SIZE	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	APPROVED Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
TL00015200	LT245/75R16*	120/116Q 10PR	RBL	30.4	10.2	6.5-(7.0)-8.0	17/32	S3042/D2778	80
TL00042200	LT265/70R16*	121/118Q 10PR	RBL	30.9	11.1	7.0-(8.0)-9.0	18/32	S3195/D2910	80
TL00450100	LT265/75R16*	123/120Q 10PR	RBL	31.9	11.0	7.0-(7.5)-9.0	17/32	S3415/D3085	80
TL00442100	LT285/75R16*	126/123Q 10PR	RBL	33.0	11.8	7.5-(8.0)-9.5	18/32	S3750/D3415	80
TL00361100	LT315/75R16*	127/124Q 10PR	RBL	34.8	12.8	8.0-(8.5)-10.5	19/32	S3860/D3525	65
TL00020800	LT265/70R17*	121/118Q 10PR	RBL	31.9	11.1	7.0-(8.0)-9.0	18/32	S3195/D2910	80
TL00494100	LT285/70R17*	121/118Q 10PR	RBL	33.0	11.8	7.5-(8.5)-9.0	18/32	S3195/D2910	80
TL00495100	LT295/70R17*	121/118Q 10PR	RBL	33.5	12.3	7.5-(8.5)-10.0	19/32	S3195/D2910	80
TL00459100	LT305/70R17*	121/118Q 10PR	RBL	34.0	12.8	8.0-(9.0)-10.0	19/32	S3195/D2910	65
TL00225100	LT315/70R17*	121/118Q 8PR	RBL	34.6	13.3	8.0-(9.5)-10.5	19/32	S3195/D2910	50
TL00466100	LT275/65R18*	123/120Q 10PR	RBL	32.5	11.1	8.0-(8.0)-9.5	18/32	S3415/D3085	80
TL00453100	LT275/70R18*	125/122Q 10PR	RBL	33.5	11.3	7.0-(8.0)-9.0	18/32	S3640/D3305	80
TL00036900	LT285/65R18*	125/122Q 10PR	RBL	32.8	11.5	8.5-(8.5)-10.0	17/32	S3640/D3305	80
TL00441100	LT285/75R18*	129/126Q 10PR	RBL	35.0	11.8	7.5-(8.0)-9.5	18/32	S4080/D3750	80
TL00433100	LT295/65R18*	127/124Q 10PR	RBL	33.5	12.1	8.5-(8.5)-10.5	18/32	S3860/D3525	80
TL00421100	LT295/70R18*	129/126Q 10PR	RBL	34.6	12.3	7.5-(8.5)-10.0	18/32	S4080/D3750	80
TL00431100	LT275/65R20*	126/123Q 10PR	RBL	34.5	11.2	8.0-(8.0)-9.5	18/32	S3750/D3415	80
TL00438100	LT295/55R20*	123/120Q 10PR	RBL	33.4	12.1	8.5-(9.5)-10.5	18/32	S3415/D3085	80
TL00374100	LT295/60R20*	126/123Q 10PR	RBL	34.4	12.2	8.5-(8.5)-10.5	18/32	S3750/D3415	80
TL00452100	LT295/65R20*	129/126Q 10PR	RBL	35.7	12.0	8.5-(8.5)-10.5	18/32	S4080/D3750	80
TL00504100	32X11.50R15LT*	113Q 6PR	RBL	31.8	11.9	7.5-(9.0)-10.0	19/32	2535	50
TL00015400	33X10.50R15LT*	114Q 6PR	RBL	32.8	11.1	7.0-(8.5)-9.0	19/32	2600	50
TL00505100	33X12.50R15LT*	108Q 6PR	RBL	32.9	13.3	8.0-(10.0)-10.5	19/32	2205	35
TL00521100	35X12.50R15LT*	113Q 6PR	RBL	34.8	13.5	8.0-(10.0)-10.5	19/32	2535	35
TL00392100	35X12.50R17LT*	121Q 10PR	RBL	34.8	13.2	8.0-(10.0)-10.5	19/32	3195	65
TL00443100	35X13.50R17LT*	121Q 10PR	RBL	34.8	14.2	8.5-(11.0)-11.0	19/32	3195	65
TL00101200	37X12.50R17LT*	128Q 10PR	RBL	36.7	13.2	8.0-(10.0)-10.5	19/32	3970	65
TL00037100	37X13.50R17LT*	121Q 8PR	RBL	36.8	14.4	9.0-(11.0)-11.5	19/32	3195	50
TL00015300	40X13.50R17LT*	121Q 6PR	RBL	39.9	14.3	9.0-(11.0)-11.5	19/32	3195	35
TL00043900	33X12.50R18LT*	122Q 12PR	RBL	32.9	12.8	8.5-(10.0)-11.0	19/32	3305	80
TL00364100	35X12.50R18LT*	123Q 10PR	RBL	34.8	13.2	8.5-(10.0)-11.0	19/32	3415	65
TL00039700	35X12.50R18LT*	128Q 12PR	RBL	34.8	13.2	8.5-(10.0)-11.0	19/32	3970	80
TL00460100	37X12.50R18LT*	123Q 8PR	RBL	36.9	13.0	8.0-(10.0)-10.5	19/32	3415	50
TL00037200	33X12.50R20LT*	119Q 12PR	RBL	32.8	12.5	8.5-(10.0)-11.0	19/32	3000	80
TL00015500	35X12.50R20LT*	121Q 10PR	RBL	34.8	13.0	8.5-(10.0)-11.0	19/32	3195	65
TL00039800	35X12.50R20LT*	125Q 12PR	RBL	34.8	12.9	8.5-(10.0)-11.0	19/32	3640	80
TL00036300	37X12.50R20LT*	128Q 12PR	RBL	36.8	12.5	8.5-(10.0)-11.0	19/32	3970	80
TL00436100	37X13.50R20LT*	127Q 10PR	RBL	36.9	14.3	9.5-(11.0)-12.0	19/32	3860	65
TL00039900	37X13.50R20LT*	128Q 12PR	RBL	36.8	14.3	9.5-(11.0)-12.0	19/32	3970	80
TL00388100	38X13.50R20LT*	128Q 10PR	RBL	37.7	14.3	9.5-(11.0)-12.0	19/32	3970	65
TL00445100	40X13.50R20LT*	128Q 10PR	RBL	39.8	14.1	9.0-(11.0)-11.5	19/32	3970	65
TL00037000	35X12.50R22LT*	121Q 12PR	RBL	35.0	12.5	8.5-(10.0)-11.0	19/32	3195	80
TL00036400	37X12.50R22LT*	127Q 12PR	RBL	36.8	12.5	8.5-(10.0)-11.0	19/32	3860	80
TL00383100	37X13.50R22LT*	123Q 10PR	RBL	36.8	13.9	9.5-(11.0)-12.0	19/32	3415	65



PREMITRA ICE NORD NP5

PART #	SIZE	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	APPROVED Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	UTQG
TP00173700	175/70R13	82T	BSW	22.6	7.0	4.5-(5.0)-6.0	11/32	1047	44
TP00129000	175/65R14	82T	BSW	23.1	6.9	5.0-(5.0)-6.0	11/32	1047	44
TP00173900	175/70R14	84T	BSW	23.6	7.0	4.5-(5.0)-6.0	11/32	1102	44
TP00173300	185/60R14	82T	BSW	22.8	7.4	5.0-(5.5)-6.5	11/32	1047	44
TP00172700	185/65R14	86T	BSW	23.5	7.4	5.0-(5.5)-6.5	11/32	1168	44
TP00174900	185/70R14	88T	BSW	24.2	7.5	4.5-(5.5)-6.0	11/32	1235	44
TP00127800	185/55R15	86T XL	BSW	23.1	7.6	5.0-(6.0)-6.5	11/32	1168	50
TP00173500	185/60R15	84T	BSW	23.9	7.4	5.0-(5.5)-6.5	11/32	1102	44
TP00172900	185/65R15	88T	BSW	24.4	7.4	5.0-(5.5)-6.5	11/32	1235	44
TP00128600	195/55R15	89T XL	BSW	23.4	7.8	5.5-(6.0)-7.0	11/32	1279	50
TP00172300	195/60R15	92T XL	BSW	24.3	7.8	5.5-(6.0)-7.0	11/32	1389	50
TP00127600	195/65R15	95T XL	BSW	25.1	7.9	5.5-(6.0)-7.0	11/32	1521	50
TP00174100	205/65R15	99T XL	BSW	25.5	8.3	5.5-(6.0)-7.5	11/32	1709	50
TP00128800	195/55R16	87T	BSW	24.4	7.8	5.5-(6.0)-7.0	11/32	1356	44
TP00007400	205/55R16	94T	BSW	24.9	8.4	5.5-(6.5)-7.5	12/32	1477	50
TP00174300	205/60R16	96T XL	BSW	25.7	8.1	5.5-(6.0)-7.5	11/32	1565	50
TP00128200	215/55R16	97T XL	BSW	25.3	8.8	6.0-(7.0)-7.5	11/32	1609	50
TP00174700	215/60R16	99T XL	BSW	26.2	8.7	6.0-(6.5)-7.5	11/32	1709	50
TP00174800	225/60R16	102T XL	BSW	26.7	8.9	6.0-(6.5)-8.0	11/32	1874	50
TP00175000	205/50R17	93T XL	BSW	25.2	8.3	5.5-(6.5)-7.5	11/32	1433	50
TP00132800	205/55R17	95T XL	BSW	25.9	8.3	5.5-(6.5)-7.5	11/32	1521	50
TP00175100	215/50R17	95T XL	BSW	25.6	8.8	6.0-(7.0)-7.5	11/32	1521	50
TP00128400	215/55R17	98T XL	BSW	26.4	8.8	6.0-(7.0)-7.5	11/32	1653	50
TP00173100	225/45R17	94T XL	BSW	25.0	8.7	7.0-(7.5)-8.5	11/32	1477	50
TP00174500	225/50R17	98T XL	BSW	26.0	9.1	6.0-(7.0)-8.0	11/32	1653	50
TP00129200	225/55R17	101T XL	BSW	26.9	9.1	6.0-(7.0)-8.0	11/32	1819	50
TP00172500	245/40R18	97T XL	BSW	25.8	9.7	8.0-(8.5)-9.5	11/32	1609	50

TO ORDER THE TIRE STUDDED ADD A “D” TO THE END OF THE PART NUMBER.

PREMITRA ICE NORD NS5

PART #	SIZE	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	APPROVED Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	UTQG
TP00032800	235/75R15	105T	BSW	28.9	9.3	6.0-(6.5)-8.0	12/32	2039	44
TP00021900	215/65R16	98T	BSW	27.0	8.5	6.0-(6.5)-7.5	12/32	1653	44
TP00033700	215/70R16	100T	BSW	27.9	8.5	5.5-(6.5)-7.0	12/32	1764	44
TP00033900	225/70R16	103T	BSW	28.4	8.9	6.0-(6.5)-7.5	12/32	1929	44
TP00034500	235/70R16	106T	BSW	29.0	9.3	6.0-(7.0)-8.0	12/32	2094	44
TP00034700	245/70R16	111T XL	BSW	29.5	9.6	6.5-(7.0)-8.0	12/32	2403	50
TP00034100	265/70R16	112T	BSW	30.6	10.4	7.0-(8.0)-9.0	12/32	2469	44
TP00034300	275/70R16	114T	BSW	31.2	10.8	7.0-(8.0)-9.0	12/32	2601	44
TP00032200	215/60R17	96T	BSW	27.2	8.7	6.0-(6.5)-7.5	12/32	1565	44
TP00032400	225/60R17	103T XL	BSW	27.6	9.0	6.0-(6.5)-8.0	12/32	1929	50
TP00022800	225/65R17	102T	BSW	28.5	8.9	6.0-(6.5)-8.0	12/32	1874	44
TP00222500	235/65R17	108T XL	BSW	29.1	9.3	6.5-(7.0)-8.5	12/32	2205	50
TP00023200	265/65R17	116T XL	BSW	30.6	10.4	7.5-(8.0)-9.5	12/32	2756	50
TP00442300	215/55R18	99T XL	BSW	27.3	8.5	6.0-(7.0)-7.5	12/32	1709	50
TP00442400	225/60R18	104T XL	BSW	28.6	8.9	6.0-(6.5)-8.0	12/32	1984	50
TP00033300	235/55R18	104T XL	BSW	28.1	9.3	6.5-(7.5)-8.5	12/32	1984	50
TP00032600	235/60R18	107T XL	BSW	29.1	9.3	6.5-(7.0)-8.5	12/32	2149	50
TP00033500	255/55R18	109T XL	BSW	29.0	10.0	7.0-(8.0)-9.0	12/32	2271	50
TP00442500	265/55R19	113T XL	BSW	30.5	10.4	7.5-(8.5)-9.5	12/32	2535	50
TP00442600	245/45R20	103T XL	BSW	28.7	9.7	7.5-(8.0)-9.0	12/32	1929	50

TO ORDER THE TIRE STUDDED ADD A “D” TO THE END OF THE PART NUMBER.

PREMITRA ICE SP5

PART #	SIZE	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	APPROVED Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	UTQG
TP00368500	175/65R14	82T	BSW	23.0	6.9	5.0-(5.0)-6.0	10/32	1047	44
TP00406400	185/60R15	84T	BSW	23.7	7.3	5.0-(5.5)-6.5	10/32	1102	44
TP00406500	185/65R15	92T XL	BSW	24.4	7.3	5.0-(5.5)-6.5	10/32	1389	50
TP00406800	195/65R15	91T	BSW	25.0	7.7	5.5-(6.0)-7.0	10/32	1356	44
TP00335300	205/55R16	94T XL	BSW	24.9	8.1	5.5-(6.5)-7.5	10/32	1477	50
TP00406900	205/60R16	96T XL	BSW	25.7	8.1	5.5-(6.0)-7.5	10/32	1565	50
TP00406300	205/55R17	95T XL	BSW	25.9	8.1	5.5-(6.5)-7.5	10/32	1521	50
TP00445100	215/50R17	95T XL	BSW	25.5	8.5	6.0-(7.0)-7.5	10/32	1521	50
TP00407100	215/55R17	98T XL	BSW	26.3	8.5	6.0-(7.0)-7.5	10/32	1653	50
TP00408300	225/45R17	94T XL	BSW	25.0	8.9	7.0-(7.5)-8.5	10/32	1477	50
TP00407300	225/50R17	98T XL	BSW	25.9	8.9	6.0-(7.0)-8.0	10/32	1653	50
TP00407500	225/55R17	101T XL	BSW	26.8	8.9	6.0-(7.0)-8.0	10/32	1819	50
TP00445200	215/50R18	96T XL	BSW	26.5	8.5	6.0-(7.0)-7.5	10/32	1565	50
TP00407400	225/50R18	99T XL	BSW	26.9	8.9	6.0-(7.0)-8.0	10/32	1709	50
TP00408600	235/45R18	98T XL	BSW	26.3	9.3	7.5-(8.0)-9.0	10/32	1653	50
TP00407600	245/45R18	100T XL	BSW	26.7	9.7	7.5-(8.0)-9.0	10/32	1764	50
TP00407800	225/45R19	96T XL	BSW	27.0	8.9	7.0-(7.5)-8.5	10/32	1565	50
TP00445300	235/40R19	96T XL	BSW	26.4	9.3	8.0-(8.5)-9.5	10/32	1565	50
TP00407900	245/40R19	98T XL	BSW	26.7	9.7	8.0-(8.5)-9.5	10/32	1653	50
TP00408000	245/45R19	102T XL	BSW	27.7	9.7	7.5-(8.0)-9.0	10/32	1874	50
TP00447800	245/50R19	105T XL	BSW	28.7	9.7	7.0-(7.5)-8.5	10/32	2039	50
TP00445400	245/40R20	99T XL	BSW	27.7	9.7	8.0-(8.5)-9.5	10/32	1709	50

PREMITRA ICE SP5 SUV

PART #	SIZE	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	APPROVED Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	UTQG
TP00368600	215/65R16	98T	BSW	27.0	8.5	6.0-(6.5)-7.5	11/32	1653	44
TP00370100	245/70R16	111T XL	BSW	29.5	9.6	6.5-(7.0)-8.0	11/32	2403	50
TP00370000	265/70R16	112T	BSW	30.6	10.4	7.0-(8.0)-9.0	11/32	2469	44
TP00369200	215/60R17	100T XL	BSW	27.2	8.5	6.0-(6.5)-7.5	11/32	1764	50
TP00368700	215/65R17	99T	BSW	28.0	8.5	6.0-(6.5)-7.5	11/32	1709	44
TP00369300	225/60R17	99T	BSW	27.6	8.9	6.0-(7.0)-8.0	11/32	1709	44
TP00368800	225/65R17	102T	BSW	28.5	8.9	6.0-(6.5)-8.0	11/32	1874	44
TP00368900	235/65R17	108T XL	BSW	29.1	9.3	6.5-(7.0)-8.5	11/32	2205	50
TP00407700	245/70R17	114T XL	BSW	30.6	9.6	6.5-(7.0)-8.0	11/32	2601	50
TP00370200	265/65R17	112T	BSW	30.6	10.4	7.5-(8.0)-9.5	11/32	2469	44
TP00369500	215/55R18	99T XL	BSW	27.3	8.5	6.0-(7.0)-7.5	11/32	1709	50
TP00370600	225/55R18	102T XL	BSW	27.8	8.9	6.0-(7.0)-8.0	11/32	1874	50
TP00369400	225/60R18	104T XL	BSW	28.6	8.9	6.0-(7.0)-8.0	11/32	1984	50
TP00369600	235/55R18	104T XL	BSW	28.1	9.3	6.5-(7.5)-8.5	11/32	1984	50
TP00335400	235/60R18	107T XL	BSW	29.1	9.3	6.5-(7.0)-8.5	11/32	2150	50
TP00369000	235/65R18	110T XL	BSW	30.0	9.3	6.5-(7.0)-8.5	11/32	2337	50
TP00370500	245/60R18	105T	BSW	29.6	9.6	7.0-(7.0)-8.5	11/32	2039	44
TP00370300	265/60R18	114T XL	BSW	30.5	10.4	7.5-(8.0)-9.5	11/32	2601	50
TP00370400	285/60R18	116T	BSW	31.5	11.2	8.0-(8.5)-10.0	11/32	2756	44
TP00408100	225/55R19	103T XL	BSW	28.8	8.9	6.0-(7.0)-8.0	11/32	1929	50
TP00371100	235/50R19	103T XL	BSW	28.3	9.3	6.5-(7.5)-8.5	11/32	1929	50
TP00370700	235/55R19	105T XL	BSW	29.2	9.3	6.5-(7.5)-8.5	11/32	2039	50
TP00370900	245/55R19	103T	BSW	29.6	9.6	7.0-(7.5)-8.5	11/32	1929	44
TP00409200	255/50R19	107T XL	BSW	29.1	10.0	7.0-(8.0)-9.0	11/32	2149	50
TP00371000	265/55R19	113T XL	BSW	30.5	10.4	7.5-(8.0)-9.5	11/32	2535	50
TP00444300	235/50R20	104T XL	BSW	29.3	9.3	6.5-(7.5)-8.5	11/32	1984	50
TP00370800	235/55R20	105T XL	BSW	30.2	9.3	6.5-(7.5)-8.5	11/32	2039	50
TP00408900	255/40R20	101T XL	BSW	28.0	10.0	8.5-(9.0)-10.0	11/32	1819	50
TP00447400	255/55R20	110T XL	BSW	31.0	10.0	7.0-(8.0)-9.0	11/32	2337	50
TP00444400	265/50R20	111T XL	BSW	30.5	10.4	7.5-(8.0)-9.5	11/32	2403	50
TP00445500	275/50R20	113T XL	BSW	30.9	10.8	7.5-(8.0)-9.5	11/32	2535	50
TP00369700	275/55R20	117T XL	BSW	31.9	10.8	7.5-(8.5)-9.5	11/32	2833	50
TP00369800	285/50R20	116T XL	BSW	31.3	11.2	8.0-(9.0)-10.0	11/32	2756	50
TP00448400	255/45R21	106T XL	BSW	30.0	10.0	8.0-(8.5)-9.5	11/32	2094	50
TP00408200	265/45R21	108T XL	BSW	30.4	10.4	8.5-(9.0)-10.0	11/32	2205	50
TP00447900	275/45R21	110T XL	BSW	30.8	10.8	8.5-(9.5)-10.5	11/32	2337	50
TP00448500	265/40R22	106T XL	BSW	30.4	10.4	9.0-(9.5)-10.5	11/32	2094	50

TIRE SAFETY

IMPORTANT TIRE INFORMATION

When customers choose Maxxis, they’re getting a product designed to deliver safety along with performance. But even the best tires must be used with caution and with close attention to safe practices. Following the guidelines and recommendations below will help to reduce the chance of accident or injury.

» **Always refer to the vehicle’s tire information placard.**

- It is preferable to replace a vehicle’s tires with ones that correspond to the vehicle’s manufacturer-recommended specifications.
- Tire speed ratings and load–carrying capacity should always be equal to or greater than the original equipment tires.

» **Service Description**

Most tires have a service description that appears at the end of the tire size. This service description has a two-digit number which represents the load index, and a letter which represents the speed rating. Example: 86H. The load index represents the maximum load each tire is designed to carry at the tire’s maximum inflation pressure.

» **Speed Rating**

Speed ratings are certified sustained speed designations assigned to passenger car radials and high performance tires. In the U.S., these ratings are based on tire testing in laboratory conditions under simulated loads. For a tire to be speed-rated, it must meet certain minimum government standards for reaching and maintaining that specified speed. Any speed symbol denoting a fixed maximum speed capability will be at the end of the service description following the load index.

Tire installers should refer to the vehicle’s owner’s manual to identify any tire speed rating restriction or recommendation that could affect the operation of the vehicle. If the replacement tires have a lower speed rating than what is specified as original equipment, the consumer should be aware that the vehicle’s speed must be restricted to that of the replacement tires. Maxxis does not recommend mixing tires of different speed ratings on a vehicle.

Note: Speed ratings apply only to the tire, not to the vehicle. Putting speed-rated tires on any vehicle does not mean that the vehicle can be operated at the tire’s rated speed. Refer to the vehicle’s operating manual for specific information.

» **Ply Rating vs. Load Range**

- Ply ratings and load ranges denote the load capability and inflation limits of a given tire size when used in a specified type of service.
- Ply Rating: An older method of rating load capacity. These are shown as 4-ply rated, 6-ply rated, 8-ply rated, etc.
- Load Range: This is the current method of rating the tire’s load-carrying capacity and is denoted by letters: B, C, D, E, etc.

» **Uniform Tire Quality Grade (UTQG)**

The UTQG, which is required by the government, provides comparative manufacturer information. Tires are subjected to a series of government-mandated tests that measure performance of treadwear, traction and temperature resistance. All testing is done by the individual manufacturer.

- Treadwear: A measurement of tread durability. Tested against an industry standard, the assigned numerical grade indicates how well the tread lasts compared to a reference of 100. Actual wear depends on the conditions under which the tire is used. Driving habits, vehicle maintenance, road surface differences and climate variations all affect treadwear.
- Traction: A measurement of the tire’s ability to stop on wet test surfaces of asphalt and concrete under controlled conditions. Traction grades are assigned by the UTQG system and branded on the sidewall of the tire. The traction grade is determined only for straight-ahead wet braking. It does not include cornering, which might be important for customer performance needs.
- Temperature (resistance): a measure of resistance to heat generation under normal operating conditions. The test is conducted under predetermined standards for inflation and loading. Excessive speed, under-inflation and overloading can all cause adverse heat build-up. Sustained high temperatures can reduce tire durability. Temperature grades are branded on the sidewall of the tire.

» **DOT (Department of Transportation) Certification**

A DOT brand on the tire’s sidewall indicates that the tire has been certified by the Department of Transportation. Following the DOT brand is a serial number that denotes the tire’s manufacturer, the manufacturing plant, tire size code and date of manufacture. While consumer tire registration is voluntary, federal law requires that the selling dealer record the DOT identification numbers and provide the DOT registration form to the consumer.

» **Mounting Procedures**

- Be sure to observe the following when mounting Maxxis tires:
- Lubricate both top and bottom beads with an approved lubricant. Never exceed 40 PSI to seat the beads.
 - Both tire beads should be securely seated on the rim.
 - Always replace a tire with another tire of the same bead diameter designation and suffix letters.
 - A new valve stem should be installed in the rim each time a worn tire (passenger or light truck) is replaced.
 - Never put any flammable substance in the tire/rim assembly at any time. Never use any flammable substance in a tire/rim assembly and attempt to ignite in order to seat the beads.
 - Be sure that the wheel is securely seated on the hub face.
 - Do not stand, lean or reach over the assembly during inflation.
 - Be sure that all lug nuts have been properly torqued to the manufacturer’s specifications.
 - Be sure that there is no build-up of dirt or debris between the hub and the wheel.
 - Be sure that the wheel is not bent or damaged. The wheel should not be used if:
 - The flange is bent.
 - The welds or rivets are leaking.
 - The stud holes are elongated (rather than round).
 - The wheel has more than 1/16” radial or lateral run-out.

TIRE SAFETY

- Matching tires on four-wheel drive and all-wheel drive vehicles: special attention should be paid to ensure that all four tires are closely matched in height and width to avoid strain and possible damage to the vehicle. Tire inflation pressure also affects the tire’s rolling circumference and should be matched according to the vehicle manufacturer’s recommendations. Always check the vehicle manufacturer’s recommendations prior to installing new tires.

Warning: improper mounting, under-inflation, overloading or tire damage may result in tire failure, which may lead to serious injury or death. Tire and rim sizes must correspond for proper fit and application.

Warning: Tire changing can be dangerous and should be done only by trained persons using proper tools and procedures as established by the Rubber Manufacturers Association. Failure to comply with proper procedures may result in incorrect positioning of the tire or wheel assembly which could cause the assembly to explode with enough force to cause serious physical injury or death. Never mount or use damaged tires.

» **If replacing fewer than four tires:**

It is always preferred and Maxxis recommends that ALL FOUR tires be replaced at the same time to optimize vehicle performance. In those cases where it is not feasible to install four new tires at the same time, some general guidelines are below. However, if the vehicle manufacturer has alternate recommendations, always follow those guidelines.

Replacing two tires: When only two new tires are purchased, they should be installed on the rear axle, as long as the new tires have a speed rating equal to or greater than the speed rating as compared to the front tires. Generally, new tires will provide better grip and evacuate water more effectively, which is important when a driver encounters hydroplaning situations. When placed on the rear axle, new tires or tires with deeper tread depth than the front tires provide greater traction on wet surfaces. This can also help prevent a possible oversteer condition and loss of vehicle stability.

Replacing one tire: While not recommended, if a single tire re-

placement is unavoidable, it is best to pair the new tire with the tire that has the deepest tread, and that both be placed on the rear axle. When placed on the rear axle, new tires or tires with deeper tread depth than the front tires provide greater traction on wet surfaces. This can also help prevent a possible oversteer condition and loss of vehicle stability.

» **Tire Speed Rating Chart**

The rating system shown below displays the top speed for which a tire is certified. It does not indicate the total performance capacity of a tire. This information will not be found on all tires. The speed rating denotes the speed for which a tire was designed to be driven for extended periods.

Rating Symbol	Speed (km/h)	Speed (mph)	Rating Symbol	Speed (km/h)	Speed (mph)
B	50	31	P	150	93
C	60	37	Q	160	99
D	65	40	R	170	106
E	70	43	S	180	112
F	80	50	T	190	118
G	90	56	U	200	124
J	100	62	H	210	130
K	110	68	V	240	149
L	120	75	W	270	168
M	130	81	Y	300	186
N	140	87	ZR	Over 240	Over 150

For tires having a maximum speed capability above 149 mph (240 km/h), a “ZR” may appear in the size designation. For tires having a maximum speed capability above 186 mph (300 km/h), a “ZR” must appear in the size designation, including a “Y” speed symbol in brackets. Example: P275/40R17 93W at 168 mph (270km/h) or P275/40ZR17 at above 149 mph (240 km/h).

ALL THE TIRES IN THIS CATALOG ARE TUBELESS.

TIRE SAFETY

Riding on worn tires can cause loss of traction, leading to an accident and possible serious injury.

Replace your tires when there is only 2/32” of tread depth remaining! All DOT-approved tires have a tread-wear indicator bar woven into the tread pattern. While this small piece of rubber appears to be a bridge between the two tire grooves, it is only 2/32” high. When the top of this indicator bar is even with the plane of the tread pattern, replace your tires.

Another way to judge this indicator: Stick a penny, head down, in the tread. Seeing the top of Lincoln’s head means that you’re down to 2/32” and your tires must be replaced.

For optimum safety, especially in wet conditions, replace your tires when you have 4/32” of tread remaining.

Always choose the original size or the size recommended by your manufacturer when replacing your tires. Replacing tires of different speed ratings, sizes or construction could lead to improper tire performance, tire failure and accident, causing possible serious injury or death.

Changing the size of your tire’s height, width, load capacity and/or tread design can change your tire’s performance.

If you must use tires of differing profiles, mount the widest tires on the rear of the vehicle.

TIRE SAFETY

Don't mix radial and non-radial tires. If you mix radial and non-radial tires, you may have trouble with consistent handling. Handling problems can lead to loss of vehicle control, accidents, injuries and death.

If you must measure the width of your tires, be sure that the tires are mounted on a rim recommended by the Tire and Rim Association (T&RA) at the specified tire pressure.

Depending on a tire's construction, if a tire is mounted on too narrow or too wide a rim, the tire's profile will be changed. The resulting change can unbalance and stress the tire's body and lead to poor performance, tire failure, accidents, injury and/or death.

Never use P-metric automotive tires as replacements for light truck tires or on a vehicle equipped with dual-rear tires. Each tire is manufactured with a specific speed rating and load requirements to ensure proper vehicle use.

Damaged or incorrectly mounted tires can suddenly fail, causing serious injury or death. Tires should only be repaired by professionals!

NEVER OVERLOAD YOUR TIRES! Overloading can cause a range of problems – everything from poor handling and poor mileage to failure of vehicle components or tire failure. Tire failure can cause accidents, leading to serious injuries and death. Check your owner's manual to be sure that you're within safety limits for the load your tires can handle. If you're having tires mounted, be sure to check the load limit of the tires to be mounted. The load index of the replacement tires should always meet or exceed the maximum load of the original tires.

Proper tire inflation is essential! Your vehicle cannot handle its load without the right amount of air pressure – and the results could be disastrous, including accidents, serious injuries and death. Most tire failures are caused by under-inflation. Proper inflation is also essential for your vehicle's performance. Unless your tires are properly inflated, you won't get the best gas mileage from your vehicle. In

fact, you could lose as much as 5% of your car's optimum mileage by failing to properly inflate your tires.

Check your tire pressure at least once a month, and always check before long trips. Use a tire gauge, and be sure that your tires are still cold when you check them. If your vehicle still has its original tires, use the optimum pressure specified by the vehicle manufacturer as a guide. If you've replaced your tires, check with your dealer regarding optimum tire pressure.

REMEMBER: Your tires can be under-inflated long before you can see or feel any change. Don't trust your eyes, and don't trust your vehicle's feel; trust a tire gauge!

NEVER SPIN YOUR TIRES! Being stuck in mud or snow can be frustrating – but if you spin your tires, being stuck can be dangerous. Your tire might be spinning much faster than your speedometer indicates, causing injury or death as well as damage to your vehicle. A tire spinning off the ground presents an equal or greater hazard. NEVER STAND BEHIND OR CLOSE TO A SPINNING TIRE!

Excess speed is a danger to your tires, your vehicle and your safety! Driving above the speed limit can stress your tires, leading to sudden tire failure.

Remember that a mini-spare tire is a temporary fix, and is NOT designed to be ridden for long periods of time! NEVER drive over 50 miles per hour when using a mini-spare tire. Have a new tire installed as soon as possible.

Check the inflation in your spare tire as well. Spare tires lose air pressure over time. You don't want to discover that your spare tire is under-inflated when you need it most.

You should also periodically replace your spare to prevent damage from aging.

TIRE MAINTENANCE AND INFORMATION

Avoid irregular tire wear, which can contribute to poor tire performance and tire failure! Failing to rotate your tires at least every 6000-8000 miles also means that you'll have to replace them much more quickly. Always refer to your owner's manual for the rotation schedule and pattern specific to your vehicle.

Unbalanced tires, which can be caused by hitting curbs, potholes or other road hazards, affect your ride quality and tire life. You can usually detect an unbalanced tire through vibrations in the steering wheel at certain speeds. If you suspect that your tires may be unbalanced, have them inspected by a professional as soon as possible to avoid excessive wear and damage to your vehicle's front end parts.

Improper alignment will affect your car's tire wear, gas mileage, stability and overall performance. Even if you haven't noticed a problem, you should still have your car or truck aligned at least once a year as part of a regular maintenance program. If you think your vehicle might be out of alignment, your vehicle must be inspected by a professional as soon as possible. Have your tires inspected immediately

if you notice any warning signs of improper alignment, which include the following:

- Excessive or uneven wear
- Steering wheel pulling to the left or right
- Feeling of looseness or wandering
- Steering wheel vibration or shimmy
- Steering wheel isn't centered when car is moving straight ahead

If you will not be using your tires for a long period, don't leave them on your vehicle. Store unused tires in a cool, dry place away from sunlight and other elements which can accelerate tire aging over time.

If you're using winter or snow tires, have them mounted on all four wheels. Using winter or snow tires only on the front of your vehicle is extremely dangerous and could lead to handling problems, loss of vehicle control, accident, injury and death.

Keep tires looking their best by cleaning with a mild soap or detergent and a semi-soft bristle brush. Rinse with clean, plain water.

TIRE ASSESSMENT CHART

ABNORMAL TREAD WEAR


Tread wear issues appear as flat spots, or areas of rapid wear on the tire. They can also be seen as deformed tread blocks or cracking in the tread area. This type of wear is usually a result of brake problems, suspension or alignment problems, an unbalanced tire and wheel assembly, or misuse.



Mushroomed Tread



Rapid Shoulder Wear



Rapid Center Wear



Cracking Between Tread




Flatspot

SIDEWALL DAMAGE

Sidewall damage appears as cuts, tears, bubbles, or scrapes anywhere along the sidewall of the tire. This type of damage usually occurs when a tire encounters a road hazard. This could include anything from a curb to a bolt or piece of metal. Sharp objects or very concentrated stresses usually cause cuts and tears. Bubbles and scrapes occur due to impact damage or prolonged abrasion.



Letter Defect



Sidewall Bubble - A bulge that appears on the outside of a tire is usually a sign of separation.



Sidewall Tear



Sidewall Cut

TIRE SEPARATIONS


Separations appear as bulges on the shoulder or tread face, or as localized wear above the separated region. A groove worn along the shoulder could be a sign of separation. Separations are mainly caused by abnormal heat build-up. Excessive heat can buildup during prolonged high-speed driving, overloaded or under-inflated tire conditions. Separations can also be caused by penetration of water or foreign materials into the carcass of the tire. This material enters through cuts caused by road hazards.



Bead Separation



Tread Separation



Belt Separation



Shoulder Separation - A groove worn in the shoulder of the tire is usually evidence of separation.

ROAD HAZARD

Road hazard damage appears as protruding objects or cuts in the tire. Misuse or neglect appears as wrinkles in the inner liner or scuffing that extends around the circumference of the tire. Road hazard damage occurs when a sharp object comes in contact with the tire. Misuse and neglect can occur to severely under-inflated tires or to tires with insufficient clearance between the tire and fenders. It can also occur when dual axle tires are overloaded, or there is not enough clearance between the two tires of the assembly.



Puncture - Normally, the only evidence of a puncture will be a cut that extends from the tread of the tire through the inner liner.



Under-Inflated Tire - An abrasion may run around the circumference of the tire and wrinkles may be observed in the inner liner.

BEAD PROBLEMS

Bead problems appear as a broken bead, chafing of the rubber around the bead, or deformation of the bead area. A broken bead can occur when a tire is mounted on an improper rim or carelessly mounted or dismounted. Bead chafing can occur when mounting a tire on a dirty or mismatched rim, or when the tire is in an overloaded or under-inflated condition. A bent or deformed bead usually occurs when the tire is improperly stored, or excessive stress is applied to the bead area during mounting.



Broken Bead



Damaged Bead



Bent Bead

